

# CASA

## CASA – UP


### WALL SURFACE LIGHT



LAST UPDATE: 17-06-2026



The CASA luminaire range is the perfect lighting tool for residential lighting tasks. Although small in size the lighting performance satisfies professional standards. CASA is available as single or double directional wall light, surface mounted downlight and bollard. Computer optimized reflectors and diffusor generate light with remarkable brilliance and color consistency. Excellent corrosion resistance is archived through the use of high quality extruded aluminum and enhanced LM6 die cast alloy. CASA is suitable for environments up to 50°C.



## Technical Data



|                       |                    |
|-----------------------|--------------------|
| Ordering Code :       | 5053-B-3-563-XX    |
| Lamp :                | LED                |
| Beam :                | 30°[70°]           |
| CCT :                 | 4000 K             |
| CRI :                 | CRI >80            |
| SDCM :                | SDCM = 3           |
| Lamp Lumen :          | 200 lm             |
| Luminaire Lumen :     | 150 lm             |
| Lamp Wattage :        | 1.5 W              |
| Luminaire Wattage :   | 3 W                |
| Efficacy :            | 50 lm/W            |
| Ambient Temperature : | 50°C               |
| Lumen Maintenance     | L80B10 >108,000 h  |
| Controller :          | On-Off             |
| Input Voltage :       | 220-240Vac 50/60Hz |
| Net Weight :          | - kg.              |

### Ordering code guide

XXXX-X-X-XXX-XX

A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.



Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(O)2 943 2420-1, +66(O)2 946 4170-1  
Fax : +66(O)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

### Specification

|                         |   |
|-------------------------|---|
| IEC Standard            | IEC 60598-1 General Requirement<br>IEC 60598-2-1 Fixed Luminaires   |
| Protection              | IP66 Class I  |
| IK Rating               | Protection against mechanical impact IK10 on body and IK07 on optical part.   |
| Luminaires Body Housing | High-pressure die cast aluminum alloy body and components.<br>Extruded aluminum 56063 alloy body with low copper content.   |
| Coating Process         | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C. |
| Diffuser                | Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.  |
| Reflector               | High performance anodized spun aluminum reflector.  |
| Gasket                  | Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.   |
| External Screws         | External screws are in stainless steel with protection grease.  |
| Cable Entry             | Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 5-10mm. diameter.   |
| Led                     | High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.  |
| Driver                  | High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard.  |
| Internal Wire           | Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.   |
| Terminal Block          | Assembled with lever connectors for cable with cross section up to 4 sqmm. ENEC approved.   |
| Caution                 | Installation work has to be carried on according to the enclosed installation manual.<br>Remark: This product emits stray light at 70 degree angle.   |

|       |   |   |
|-------|---|---|
| Color |  | Black O1<br>Graphite O2<br>Dark Grey O3<br>Aluminum Silver O4<br>White O6 |
|-------|---|---|

### Light Distribution



# CASA


CASA – UP

WALL SURFACE LIGHT



LAST UPDATE: 17-06-2026

## Bug Report

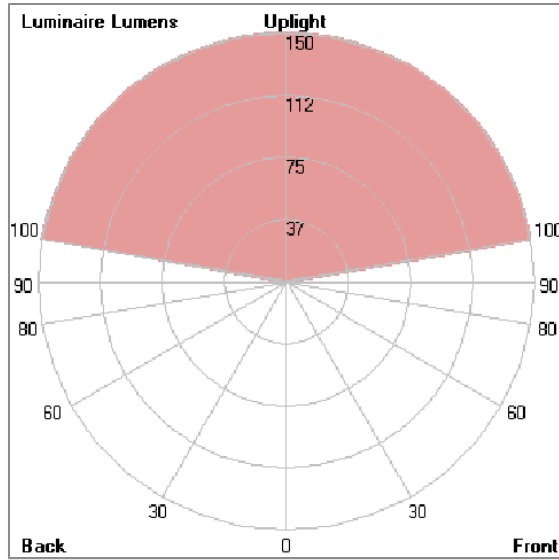

## Lum. Classification System [LCS]

| LCS        | Zone      | %Lumens | %Lamp | %Lum     |
|------------|-----------|---------|-------|----------|
| FL         | [0-30]    | 0.1     | 0.0   | 0.0      |
| FM         | [30-60]   | 0.0     | 0.0   | 0.0      |
| FH         | [60-80]   | 0.0     | 0.0   | 0.0      |
| FVH        | [80-90]   | 0.0     | 0.0   | 0.0      |
| BL         | [0-30]    | 0.1     | 0.0   | 0.0      |
| BM         | [30-60]   | 0.0     | 0.0   | 0.0      |
| BH         | [60-80]   | 0.0     | 0.0   | 0.0      |
| BVH        | [80-90]   | 0.0     | 0.0   | 0.0      |
| UL         | [90-100]  | < 0.05  | 0.0   | 0.0      |
| UH         | [100-180] | 149.8   | 74.9  | 99.9     |
| Total      |           | 150.0   | 74.9  | 100.0    |
| BUG Rating |           |         |       | B0-U3-G0 |

\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th