

MICRO ALPHA ROUND SNOOT – CV


SPOTLIGHT



LAST UPDATE: 11-11-2025



ALPHA is an entirely new family of outdoor spotlights/floodlights engineered from scratch. The primary shapes and overall small dimensions make it possible to install ALPHA in most professional and residential lighting applications. High-quality polycarbonate optics provide accurate beam control and offer a wide selection of light distributions. ALPHA can be customized with accessories such as honeycombs, shields and various mounting solutions for poles and surfaces. The minimized amount of needed tools and usage of quick connectors simplifies the installation.

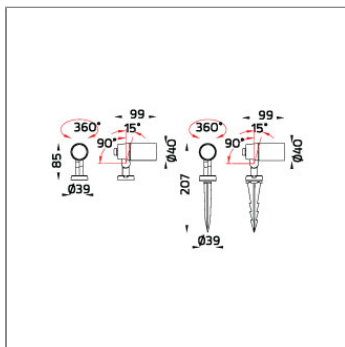

Technical Data



| | |
|-----------------------|--------------------|
| Ordering Code : | 5914-B-2-561-XX |
| Lamp : | LED |
| Beam : | 25° |
| CCT : | 2700 K |
| CRI : | CRI >80 |
| SDCM : | SDCM = 3 |
| Lamp Lumen : | 370 lm |
| Luminaire Lumen : | 100 lm |
| Lamp Wattage : | 3.3 W[12Vdc/24Vdc] |
| Luminaire Wattage : | 3.3 W |
| Efficacy : | 30 lm/W |
| Ambient Temperature : | 50°C |
| Lumen Maintenance | L80B10 >108,000 h |
| Controller : | Remote |
| Input Voltage : | 12Vdc/24Vdc |
| Net Weight : | 0.30 kg. |

Ordering code guide

XXXX-X-X-XXX-XX

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.



Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

Specification

| | |
|-------------------------|---|
| IEC Standard | IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires |
| Protection | IP66 Class III |
| IK Rating | Protection against mechanical impact IK08 on body and IK06 optical part. |
| Luminaires Body Housing | High-pressure die cast aluminum alloy body and components. |
| Coating Process | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C. |
| Diffuser | Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C. |
| Lens | Molded PC lens from renowned manufacturers in various light distribution patterns. |
| Adjustable Optic | Adjustable aiming unit through graduated scale. |
| Gasket | Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C. |
| External Screws | External screws are in stainless steel with protection grease. |
| Cable Entry | Cable entry protected by M12 cable gland. To be used with H05RN-F/ H07RN-F cable with 4-7mm. diameter. |
| Led | High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material. |
| Driver | Driver is not included and has to be ordered separately. |
| Pre-Wire Cable | Pre-wired with 2x1.0 sqmm. H05RN-F neoprene cable. IMQ approved. Equipped with anti-humidity kit. |
| Caution | Installation work has to be carried on according to the enclosed installation manual. |
| Color | <div> <div></div> Black 01 <div></div> Graphite 02 <div></div> Dark Grey 03 <div></div> Aluminum Silver 04 <div></div> White 06 </div> |

| | |
|--|--------------------|
| | Black 01 |
| | Graphite 02 |
| | Dark Grey 03 |
| | Aluminum Silver 04 |
| | White 06 |

Light Distribution

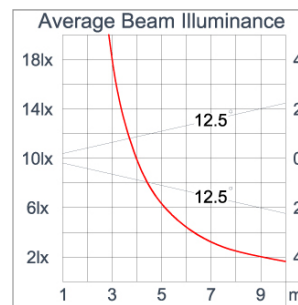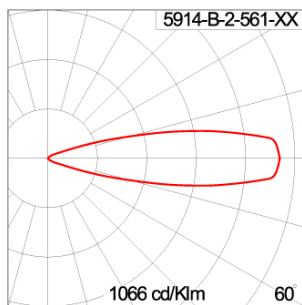


ALPHA

MICRO ALPHA ROUND SNOOT – CV SPOTLIGHT



LAST UPDATE: 11-11-2025

Bug Report

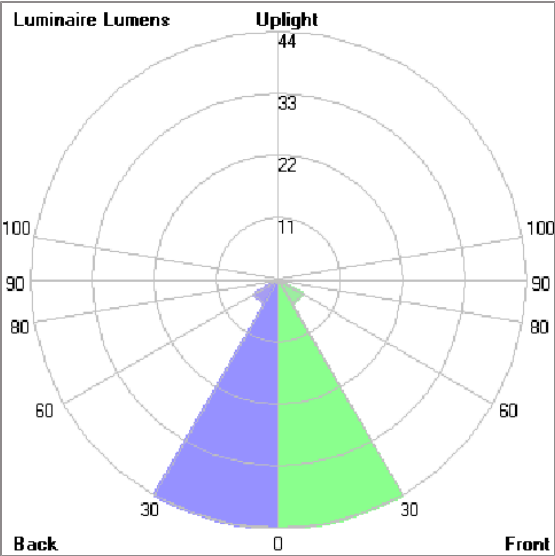

| Lum. Classification System [LCS] | | | | |
|----------------------------------|-----------|----------|-------|-------|
| LCS | Zone | %Lumens | %Lamp | %Lum |
| FL | [0-30] | 44.5 | 12.0 | 44.5 |
| FM | [30-60] | 5.0 | 1.4 | 5.0 |
| FH | [60-80] | 0.4 | 0.1 | 0.4 |
| FVH | [80-90] | < 0.05 | 0.0 | 0.0 |
| BL | [0-30] | 44.5 | 12.0 | 44.5 |
| BM | [30-60] | 5.0 | 1.4 | 5.0 |
| BH | [60-80] | 0.4 | 0.1 | 0.4 |
| BVH | [80-90] | < 0.05 | 0.0 | 0.0 |
| UL | [90-100] | 0.0 | 0.0 | 0.0 |
| UH | [100-180] | 0.1 | 0.0 | 0.1 |
| Total | | 99.9 | 27.0 | 100.0 |
| BUG Rating | | B0-U1-G0 | | |

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

ALPHA

MICRO ALPHA ROUND SNOOT – CV

SPOTLIGHT




LAST UPDATE: 11-11-2025

Accessories



Ordering Code:
AUN-DRG-0114-01
LED constant voltage
driver, 12VDC, 12W, with
IP67 GFR polymer
enclosure

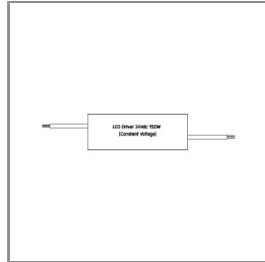


Ordering Code:
AUN-DRG-0011-00
LED constant voltage
driver, 24VDC, 150W




Ordering Code:
AUN-ESP-0003-XX
Earth spike, L= 900mm,
aluminum, pre-assembly
from factory




Ordering Code:
AUN-TRS-0004-00
Tree Strap

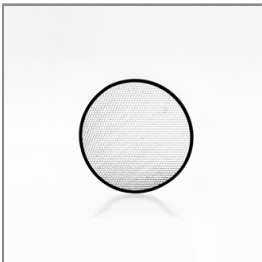

Ordering Code:
AUN-GSH-0015-00
Honeycomb louver, LED,
pre-assembly from factory

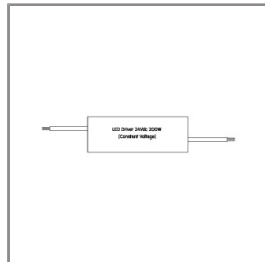

Ordering Code:
AUN-DRG-0024-00
LED constant voltage
driver, 24VDC, 200W

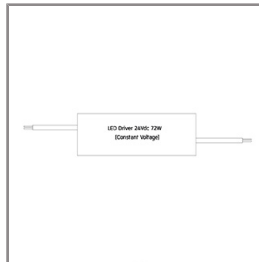


Ordering Code:
AUN-DRG-0027-00
LED constant voltage
driver, 24VDC, 72W




Ordering Code:
AUN-ESP-0006-XX
Earth spike, L= 900mm,
aluminum, single side
luminaire mounting




Ordering Code:
AUN-ESP-0007-XX
Earth spike, L= 900mm,
aluminum, double sided
luminaire mounting

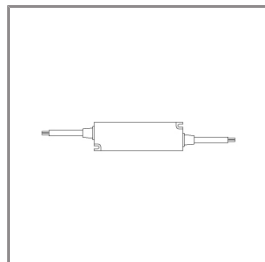

Ordering Code:
AUN-DRG-0118-00
LED constant voltage
driver, 24VDC, 30W

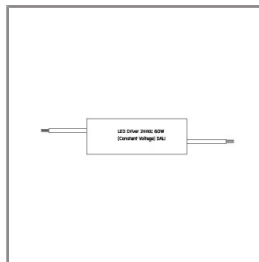

Ordering Code:
AUN-DRG-0100-00
LED constant voltage
driver, 24VDC, 60W, DALI

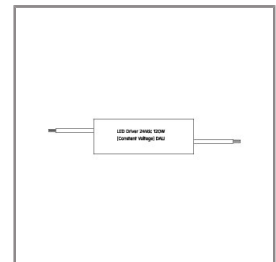

Ordering Code:
AUN-DRG-0101-00
LED constant voltage
driver, 24VDC, 120W, DALI

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

ALPHA

MICRO ALPHA ROUND SNOOT – CV SPOTLIGHT



LAST UPDATE: 11-11-2025



Ordering Code:

AUN-DRG-0126-00

LED constant current

driver, 250mA, 12W, with

IP67 GFR polymer

enclosure, On-Off, BLACK

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th