

ALPHA


MEDIUM ALPHA ROUND - ID SPOTLIGHT

 **Unilamp**

LAST UPDATE: 03-02-2026



ALPHA is an entirely new family of outdoor spotlights/floodlights engineered from scratch. The primary shapes and overall small dimensions make it possible to install ALPHA in most professional and residential lighting applications. High-quality polycarbonate optics provide accurate beam control and offer a wide selection of light distributions. ALPHA can be customized with accessories such as honeycombs, shields and various mounting solutions for poles and surfaces. The minimized amount of needed tools and usage of quick connectors simplifies the installation.



Ordering code guide

XXXX-X-X-XXX-XX

A Product Code
B Reflector
C Electrical Component
D Lamp
E Color

Technical Data



Ordering Code : 5962-A-5-534-XX

Lamp : LED

Beam : 12°

CCT : 2700 K

CRI : CRI >80

SDCM : SDCM = 3

Lamp Lumen : 3120 lm

Luminaire Lumen : 2310 lm

Lamp Wattage : 26 W

Luminaire Wattage : 28 W

Efficacy : 82 lm/W

Ambient Temperature : 25°C

Lumen Maintenance : L80B10 >108,000 h

Controller : DALI

Input Voltage : 220-240Vac 50/60Hz

Net Weight : 1.40 kg.



Icon definition



*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

Specification

IEC Standard	IEC 60598-1 General Requirement												
	IEC 60598-2-1 Fixed Luminaires												
Protection	IP66 Class I												
IK Rating	Protection against mechanical impact IK10 on body and IK08 on optical part.												
Luminaires Body Housing	High-pressure die cast aluminum alloy body and components.												
	Extruded aluminum S6063 alloy body with low copper content.												
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.												
Diffuser	Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.												
Lens	Molded PC lens from renowned manufacturers in various light distribution patterns.												
Adjustable Optic	Adjustable aiming unit through graduated scale.												
Gasket	Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.												
External Screws	External screws are in stainless steel with protection grease.												
Cable Entry	Cable entry protected by M20 cable gland. To be used with HO5RN-F/ HO7RN-F cable with 7-13mm. diameter.												
Led	High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.												
Driver	High quality DALI Driver in constant current. Conform to applicable safety standards and electromagnetic compatibility.												
Internal Wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.												
Terminal Block	Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.												
	Class1 luminaire provided with the earth connection.												
Caution	Installation work has to be carried on according to the enclosed installation manual.												
Color	<table> <tr> <td>█</td> <td>Black O1</td> </tr> <tr> <td>█</td> <td>Graphite O2</td> </tr> <tr> <td>█</td> <td>Dark Grey O3</td> </tr> <tr> <td>█</td> <td>Aluminum Silver O4</td> </tr> <tr> <td>█</td> <td>White O6</td> </tr> <tr> <td>█</td> <td>Corten O8</td> </tr> </table>	█	Black O1	█	Graphite O2	█	Dark Grey O3	█	Aluminum Silver O4	█	White O6	█	Corten O8
█	Black O1												
█	Graphite O2												
█	Dark Grey O3												
█	Aluminum Silver O4												
█	White O6												
█	Corten O8												

Light Distribution




ALPHA

MEDIUM ALPHA ROUND - ID SPOTLIGHT

 **Unilamp**

LAST UPDATE: 03-02-2026

Bug Report

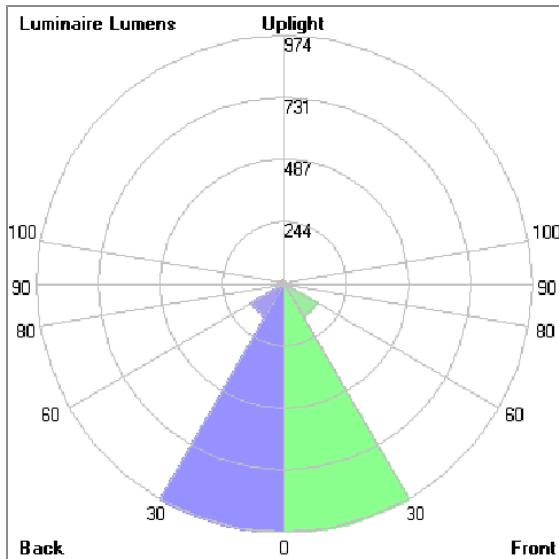

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	974.1	31.2	42.2
FM	[30-60]	148.8	4.8	6.4
FH	[60-80]	26.8	0.9	1.2
FVH	[80-90]	1.2	0.0	0.1
BL	[0-30]	974.1	31.2	42.2
BM	[30-60]	148.8	4.8	6.4
BH	[60-80]	26.8	0.9	1.2
BVH	[80-90]	1.2	0.0	0.1
UL	[90-100]	0.0	0.0	0.0
UH	[100-180]	8.7	0.3	0.4
Total		2310.5	74.1	100.0
BUG Rating				B2-U1-G0

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

ALPHA

MEDIUM ALPHA ROUND - ID SPOTLIGHT

 **Unilamp**

LAST UPDATE: 03-02-2026

Accessories




Ordering Code:
AUN-GHS-0016-00
Glare shield ring, COB




Ordering Code:
AUN-ACB-0014-00
Anchor bolt kit, bollard



Ordering Code:
AUN-CON-0011-00
IP68 connection device,
cable diameter 7.1-13mm,
1-10V or DALI




Ordering Code:
AUN-GSH-0012-00
Honeycomb louver, LED,
pre-assembly from factory




Ordering Code:
AUN-SOF-0026-00
Softening filter, LED,
pre-assembly from factory




Ordering Code:
AUN-CON-0014-00
IP68 connection device,
cable diameter 8-12.5mm,
1-10V or DALI




Ordering Code:
AUN-GHS-0028-XX
Glare shield cap



Ordering Code:
AUN-MOT-0013-XX
Pole mounting arm, for 1-3
projector



Ordering Code:
AUN-CLP-0008-XX
Pole clamp, pole diameter
102-105mm, for wall or
pole mounting arm



Ordering Code:
AUN-CLP-0009-XX
Pole clamp, pole diameter
60-76mm, for wall or pole
mounting arm



Ordering Code:
AUN-ESP-0001-00
Earth spike, GFR polymer



Ordering Code:
AUN-TRS-0001-00
Tree strap, small mounting
base

ALPHA

MEDIUM ALPHA ROUND - ID SPOTLIGHT

 **Unilamp**

LAST UPDATE: 03-02-2026



Ordering Code:
AUN-ACB-0008-00
Anchor bolt kit, pole
diameter 102mm and
151x102mm, galvanized
steel pole



Ordering Code:
AUN-ACB-0005-00
Anchor bolt kit, aluminum
pole



Ordering Code:
ALUMINUM-POLE-FOR-ALPHA-SPOTLIGHT
Please contact Sales
Representative



Ordering Code:
STEEL-POLE-FOR-ALPHA-SPOTLIGHT
Please contact Sales
Representative



Ordering Code:
AUN-MOT-0022-XX
Mounting base, rotateable,
1-10V or DALI,
pre-assembled from factory




Ordering Code:
AUN-POL-0044-XX
Cylindrical aluminum pole,
diameter 105mm, H=
522mm, 1-10V / DALI
(pre-assembled from
factory)




Ordering Code:
AUN-MOT-0019-XX
Outrigger arm, L= 740mm,
1-10V or DALI,
pre-assembled from factory



Ordering Code:
AUN-ESP-0009-XX
Earth spike, L= 900mm,
aluminum, 1-10V or DALI,
pre-assembled from factory




Ordering Code:
AUN-MOT-0039-XX
Pole mount adaptor,
rectangular pole, 1-10V or
DALI, pre-assembled from
factory



Ordering Code:
AUN-MOT-0033-XX
Pole mount adaptor, pole
diameter 60mm, 1-10V or
DALI, pre-assembled from
factory



Ordering Code:
AUN-MOT-0035-XX
Pole mount adaptor, pole
diameter 76mm, 1-10V or
DALI, pre-assembled from
factory



Ordering Code:
AUN-MOT-0037-XX
Pole mount adaptor, pole
diameter 102-105mm,
1-10V or DALI,
pre-assembled from factory

ALPHA

MEDIUM ALPHA ROUND – ID SPOTLIGHT

 **Unilamp**

LAST UPDATE: 03-02-2026



Ordering Code:
AUN-CLP-0041-XX
Pole clamp, pole diameter
60–76mm, single side
luminaire mounting , 1-10V
or DALI, pre-assembly from
factory



Ordering Code:
AUN-CLP-0043-XX
Pole clamp, pole diameter
102–105mm, single side
luminaire mounting , 1-10V
or DALI, pre-assembly from
factory



Ordering Code:
AUN-CLP-0045-XX
Pole clamp, pole diameter
60–76mm, double sided
luminaire mounting , 1-10V
or DALI, pre-assembly from
factory



Ordering Code:
AUN-CLP-0047-XX
Pole clamp, pole diameter
102–105mm, double sided
luminaire mounting , 1-10V
or DALI, pre-assembly from
factory



Ordering Code:
AUN-ESP-0024-XX
Earth spike, L=
1390–1760mm, aluminum,
length adjustable, 1-10V or
DALI, pre-assembly from
factory

Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

online@unilamp.co.th

www.unilamp.co.th