




SONIC is a huge family of spotlight/floodlight with LED, HID and retrofit light source. The family offers ground/wall mount fixing, pole clamp and wall clamp array, indirect pole and wall light. The wide ranges of accessories like glare shield unit, tree strap, earth spike and anchorage bolt kit makes SONIC customizable for most application. Available in three sizes with a choice of six colors. SONIC is fitted with COB LED with high CRI in 2700K, 3000K or 4000K color temperature with 3 SDCM. The front glass cover is flush to the luminaire housing thus dust and water are not accumulated. High specular reflectors are used in this luminaire family to achieve an outstanding light output ratio. Aiming can be done through graduated scale by tool. For ease of installation and improved thermal performance the control gear compartment is housed separately to the light engine. SONIC is an ideal choice to accentuate sculptures, walls, building facades, bushes and trees.

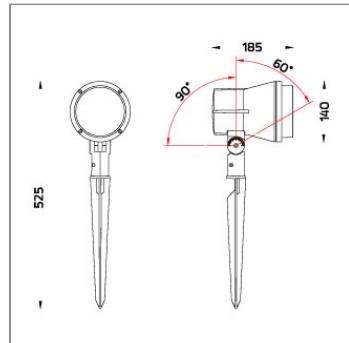

Ordering code guide

XXXX-X-X-XXX-XX

A B D
| | |
A C E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color

Technical Data



Ordering Code :	5979-0-2-262-XX
Socket	E27
CCT :	2700-6500 K
Lamp Wattage :	10-15 W
Luminaire Wattage :	18 W
Ambient Temperature :	40°C
Lumen Maintenance	L70B10 >60,000 h
Controller :	On-Off
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	- kg.





Icon definition


Specification

IEC Standard	IEC 60598-1 General Requirement										
	IEC 60598-2-1 Fixed Luminaires										
Protection	IP65 Class I										
IK Rating	Protection against mechanical impact IK08 on body and IK06 on optical part										
Luminaires Body Housing	Durable high-pressure die-cast aluminum alloy for excellent mechanical performance.										
Coating Process	The luminaire undergoes a Nano Ceramic surface conversion, making it highly resistant to corrosive environments. It is primarily coated with a durable epoxy resin and finished with a UV-stabilized polyester powder top coat. The coating process is completed by curing the luminaire in a digitally controlled temperature chamber at 200°C, ensuring exceptional durability and long-lasting protection aga										
Diffuser	Impact-resistant tempered glass designed for high-temperature environments.										
Adjustable Optic	Adjustable aiming mechanism with graduated scale for precision control.										
Gasket	Advanced post-cured silicone gasket offering superior weather and thermal resistance (-40°C to +200°C).										
External Screws	Durable stainless steel screws with anti-corrosion grease for extended lifespan.										
Cable Entry	M14 cable gland for secure cable entry, compatible with HO5RN-F/H07RN-F cables (5-8mm).										
Lamp Holder	Certified E27 ceramic lampholder designed for high-temperature applications.										
Internal Wire	Reliable silicone-insulated tinned copper internal wire, designed for -40°C to +180°C.										
Terminal Block	Grounded Class 1 luminaire ensuring proper earthing for secure operation.										
Pre-Wire Cable	Certified pre-wired 3x1.0 sqmm cable, featuring H07RN-F neoprene insulation.										
Caution	Integrated anti-humidity kit preventing moisture buildup and ensuring longevity.										
Color	<table><tr><td></td><td>Black 01</td></tr><tr><td></td><td>Graphite 02</td></tr><tr><td></td><td>Dark Grey 03</td></tr><tr><td></td><td>Aluminum Silver 04</td></tr><tr><td></td><td>White 06</td></tr></table>		Black 01		Graphite 02		Dark Grey 03		Aluminum Silver 04		White 06
	Black 01										
	Graphite 02										
	Dark Grey 03										
	Aluminum Silver 04										
	White 06										

Light Distribution



Bug Report

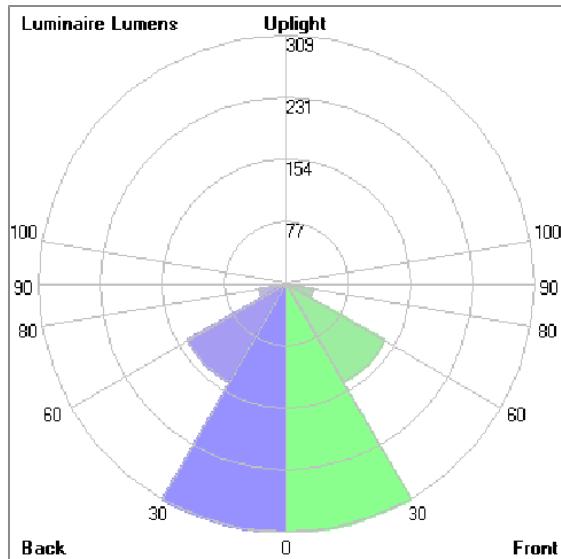

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	308.6	28.1	31.5
FM	[30-60]	141.9	12.9	14.5
FH	[60-80]	34.3	3.1	3.5
FVH	[80-90]	5.0	0.5	0.5
BL	[0-30]	308.6	28.1	31.5
BM	[30-60]	141.9	12.9	14.5
BH	[60-80]	34.3	3.1	3.5
BVH	[80-90]	5.0	0.5	0.5
UL	[90-100]	0.6	0.1	0.1
UH	[100-180]	0.0	0.0	0.0
Total		980.2	89.3	100.0
BUG Rating			B1-U1-G0	

SONIC

MEDIUM SONIC SPIKE SPOTLIGHT

 **Unilamp**

LAST UPDATE: 08-01-2026

Accessories



Ordering Code:
AUN-GHS-0002-XX
Glare shield cap

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th