


# DOT

DOT ROUND – CV

WALL RECESSED

 **Unilamp**

LAST UPDATE: 18-06-2024

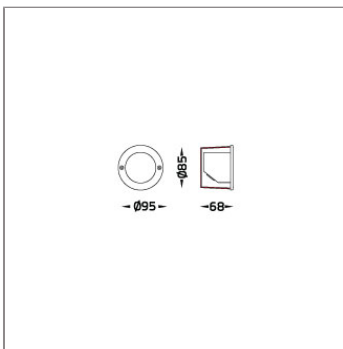

DOT family is a range of small recessed wall luminaires with LED light sources. Fitted with world renowned LED manufacturer DOT is highly efficient with low energy consumption. The glare-free cover enables them to be installed where comfortable illumination is required. DOT is available in four different design with interchangeable front covers in both square and round shapes. A very small and shallow housing allows the installation of the fixtures in wall or step that have limited recessing depth. DOT provides directional light for stairways and pathways where comfortable low level of light is preferred.

## Technical Data



|                       |                 |
|-----------------------|-----------------|
| Ordering Code :       | 6014-O-2-291-XX |
| Lamp :                | QT9             |
| Socket :              | G4              |
| CCT :                 | 3000 K          |
| Lamp Lumen :          | 140 lm          |
| Luminaire Lumen :     | 140 lm          |
| Lamp Wattage :        | 10 W            |
| Luminaire Wattage :   | 10 W            |
| Ambient Temperature : | 25°C            |
| Controller :          | Remote          |
| Input Voltage :       | 12Vac 50/60Hz   |
| Net Weight :          | 0.30 kg.        |

### Ordering code guide

XXXX-X-X-XXX-XX

A                      B                      C                      D                      E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color





















Icon definition



\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1  
Fax : +66(0)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

### Specification

|   |   |   |          |   |             |   |              |   |                    |   |          |   |                 |
|---|---|---|----------|---|-------------|---|--------------|---|--------------------|---|----------|---|-----------------|
| IEC Standard  | IEC 60598-1 General Requirement<br>IEC 60598-2-2 Recessed Luminaires  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Protection  | IP65 Class III  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| IK Rating   | Protection against mechanical impact IK07 on body and optical part.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Luminaires Body Housing   | High-pressure die cast aluminum alloy body and components.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Coating Process   | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Diffuser  | Self-extinguishing high impact resistant clear polycarbonate diffuser with UV stabilized additive.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Gasket  | Weather resistant silicone gasket. Working temperature -40°C to +200°C.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| External Screws   | External screws are in stainless steel with protection grease.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Cable Entry   | Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 5-10mm. diameter.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Lamp Holder   | G4 lampholder in PPS body. VDE/ ENEC approved.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Ballast   | Control gear is not included and has to be ordered separately.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Terminal Block  | Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Caution   | Installation work has to be carried on according to the enclosed installation manual.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Color   | <table><tr><td></td><td>Black O1</td></tr><tr><td></td><td>Graphite O2</td></tr><tr><td></td><td>Dark Grey O3</td></tr><tr><td></td><td>Aluminum Silver O4</td></tr><tr><td></td><td>White O6</td></tr><tr><td></td><td>Wooden Brown O7</td></tr></table> |  | Black O1 |  | Graphite O2 |  | Dark Grey O3 |  | Aluminum Silver O4 |  | White O6 |  | Wooden Brown O7 |
|  | Black O1  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Graphite O2   |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Dark Grey O3  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Aluminum Silver O4  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | White O6  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Wooden Brown O7   |   |          |   |             |   |              |   |                    |   |          |   |                 |

### Light Distribution



# DOT


DOT ROUND – CV

WALL RECESSED



LAST UPDATE: 18-06-2024

## Bug Report

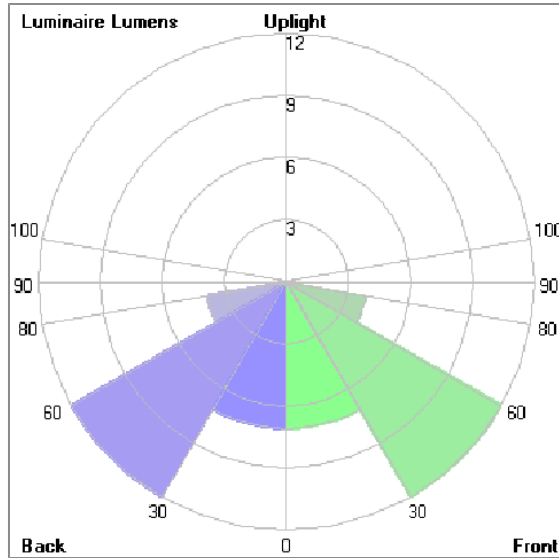

### Lum. Classification System [LCS]

| LCS        | Zone      | %Lumens  | %Lamp | %Lum  |
|------------|-----------|----------|-------|-------|
| FL         | [0-30]    | 7.2      | 5.1   | 15.1  |
| FM         | [30-60]   | 12.1     | 8.6   | 25.5  |
| FH         | [60-80]   | 3.9      | 2.8   | 8.3   |
| FVH        | [80-90]   | 0.5      | 0.3   | 1.0   |
| BL         | [0-30]    | 7.2      | 5.1   | 15.1  |
| BM         | [30-60]   | 12.1     | 8.6   | 25.5  |
| BH         | [60-80]   | 3.9      | 2.8   | 8.3   |
| BVH        | [80-90]   | 0.5      | 0.3   | 1.0   |
| UL         | [90-100]  | < 0.05   | 0.0   | 0.1   |
| UH         | [100-180] | 0.0      | 0.0   | 0.0   |
| Total      |           | 47.4     | 33.6  | 100.0 |
| BUG Rating |           | B0-U1-G0 |       |       |

\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

# DOT

DOT ROUND – CV  
WALL RECESSED



LAST UPDATE: 18-06-2024

## Accessories



Ordering Code:  
AUN-DRG-0115-01  
Electronic Transformer,  
12V, 20-60W, with IP67  
GFR polymer enclosure

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th