
DRIFT

MAXI FLAT DRIFT


WALL SURFACE LIGHT



LAST UPDATE: 24-03-2025

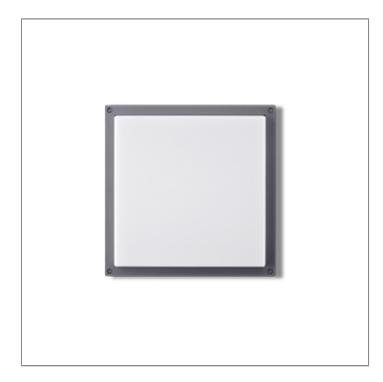

Square in shape DRIFT wall and ceiling lights have a rugged aluminium structure and impact resistant polycarbonate diffuser. The LED module is available with built-in microwave motion sensor and hi-low light function. The color temperature is 3000K or 4000K with choice of Dali option. The high protection rating of IP65 and IKO9 allows DRIFT to be installed in the harshest outdoor environments. With the diffused light distribution, it provides good low glare general lighting to private and public areas. The front cover is available in various designs; moreover, DRIFT is available with the choice of six different colors.



Technical Data

Ordering Code: 7032-0-3-988-XX

Lamp: LED CCT: 4000 K CRI: CRI >80 SDCM = 5SDCM: Lamp Lumen: 2550 lm Luminaire Lumen : 1860 lm Lamp Wattage: 23 W 25 W Luminaire Wattage: Efficacy: 74 lm/W Ambient Temperature : 40°C

Lumen Maintenance L70B10 >36,000 h

Controller: On-Off

Input Voltage: 220-240Vac 50/60Hz

Net Weight : 5.30 kg.

Ordering code guide XXXX-X-X-XXX-XX À Product Code Reflector C D E Electrical Component Lamp Color



Icon definition



MAXI FLAT DRIFT

WALL SURFACE LIGHT



LAST UPDATE: 24-03-2025

Specification

External Screws

IEC Standard IEC 60598-1 General Requirement

IEC 60598-2-1 Fixed Luminaires

Protection IP65 Class II

IK Rating Protection against mechanical impact IK10 on body and optical part.

Luminaires Body Housing High-pressure die cast aluminum alloy body and components.

Coating Process Nano Ceramic surface conversion, resistant to corrosive environment. Luminiare primarily coated with epoxy resin and top coated

with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.

Diffuser Self-extinguishing high impact resistant opal polycarbonate diffuser with UV stabilized additive.

External screws are in stainless steel with protection grease.

Gasket Weather resistant silicone gasket. Working temperature -40°C to +200°C.

Cable Entry Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 6-13mm. diameter.

Led High efficiency SMD LED module with built-in constant current LED driver. Replacable module for future upgrade or maintenance.

Internal Wire Tinned copper conductor with PTFE insulated internal wire. IMQ approved. Working temperature -40°C to +250°C.


Terminal Block Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.


Caution Installation work has to be carried on according to the enclosed installation manual.

Color Black O1

Black O1 Graphite O2 Dark Grey O3 Aluminum Silver O4 White O6

Light Distribution





DRIFT


MAXI FLAT DRIFT

WALL SURFACE LIGHT



LAST UPDATE: 24-03-2025

Bug Report

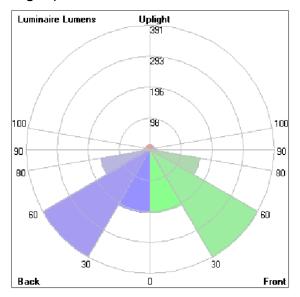

Lum. Classification System (LCS)				
LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	198.8	7.8	12.7
FM	[30-60]	391.1	15.3	25.0
FH	[60-80]	158.9	6.2	10.1
FVH	[80-90]	21.3	8.0	1.4
BL	[0-30]	198.8	7.8	12.7
ВМ	[30-60]	390.5	15.3	24.9
ВН	[60-80]	157.9	6.2	10.1
BVH	[80-90]	21.1	8.0	1.3
UL	[90-100]	15.1	0.6	1.0
UH	[100-180]	13.7	0.5	0.9
Total		1567.2	61.3	100.0
BUG Rating		B1-U2-G1		