

DARIUS

DARIUS


WALL SURFACE LIGHT



LAST UPDATE: 01-04-2026



DARIUS is a circular-shaped surface-mount light featuring a robust aluminum housing and impact-resistant polycarbonate lens cover. Its diffused light distribution provides general illumination in private, public, and commercial areas. DARIUS is available with AC COB LED or E27 lamp holder for compact fluorescent, or retrofit LED lamps. The lens cover is designed with a twist-lock mechanism, which allows for simple and secure installation and re-lamping procedures. The high protection rating of IP65 and IK09 allows DARIUS to be installed in the majority of outdoor environments.

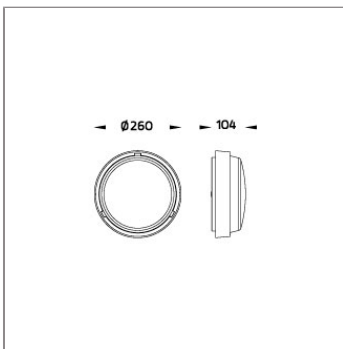

Technical Data



Ordering Code :	7071-0-3-499-XX
Lamp :	Led Retrofit E27
CCT :	6500 K
Lamp Lumen :	1500 lm
Luminaire Lumen :	340 lm
Lamp Wattage :	18 W
Luminaire Wattage :	18 W
Efficacy :	18 lm/W
Ambient Temperature :	40°C
Controller :	On-Off
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	- kg.

Ordering code guide

XXXX-X-X-XXX-XX
A C E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

DARIUS



















DARIUS

WALL SURFACE LIGHT





LAST UPDATE: 01-04-2026

Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires												
Protection	IP65 Class I												
Luminaires Body Housing	High-pressure Die Cast Aluminium alloy body and components.												
Coating Process	UV stablized polyester powder coat.												
Diffuser	Vandal proof PC diffuser												
Gasket	Durable silicone gasket												
External Screws	External screws made of stainless steel												
Led	High efficiency LED module												
Caution	Installation work has to be carried on according to the enclosed installation manual.												
Color	<table><tr><td></td><td>Black O1</td></tr><tr><td></td><td>Graphite O2</td></tr><tr><td></td><td>Dark Grey O3</td></tr><tr><td></td><td>Aluminum Silver O4</td></tr><tr><td></td><td>White O6</td></tr><tr><td></td><td>Wooden Brown O7</td></tr></table>		Black O1		Graphite O2		Dark Grey O3		Aluminum Silver O4		White O6		Wooden Brown O7
	Black O1												
	Graphite O2												
	Dark Grey O3												
	Aluminum Silver O4												
	White O6												
	Wooden Brown O7												

Light Distribution

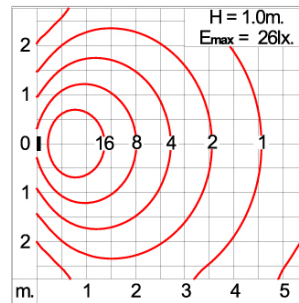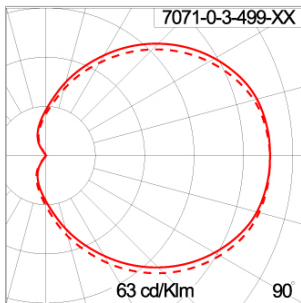

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

DARIUS


DARIUS

WALL SURFACE LIGHT



LAST UPDATE: 01-04-2026

Bug Report

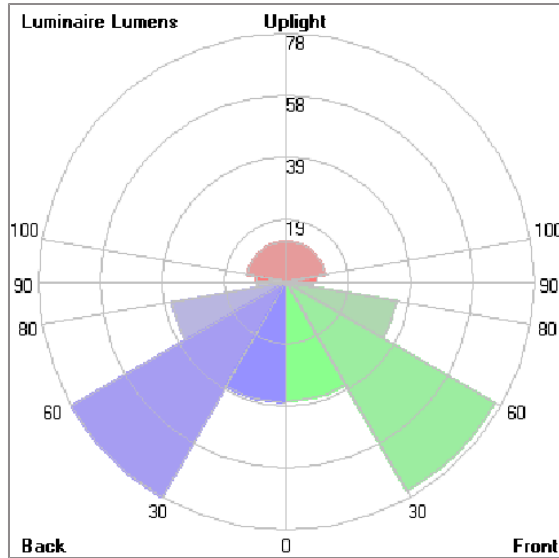

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	37.4	2.5	11.0
FM	[30-60]	75.8	5.1	22.3
FH	[60-80]	35.2	2.3	10.4
FVH	[80-90]	8.4	0.6	2.5
BL	[0-30]	37.9	2.5	11.2
BM	[30-60]	77.9	5.2	22.9
BH	[60-80]	36.5	2.4	10.7
BVH	[80-90]	8.9	0.6	2.6
UL	[90-100]	9.5	0.6	2.8
UH	[100-180]	12.5	0.8	3.7
Total		340.0	22.6	100.0
BUG Rating		BO-U2-GO		

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th