
MAXI CORE OPTIC - POLE LIGHT / **DOUBLE SIDED**


POLE MOUNTED LIGHT



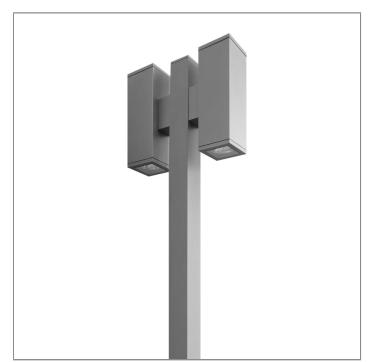

LAST UPDATE: 21-10-2025

Characterized by clean and clear-cut lines CORE is a family of square wall light, ceiling light, bollard and pole lights. CORE is available in two sizes and equipped with COB LED/ High Power LED in three color temperatures with exceptional color consistency. It is also available in HID version as well as with E27 holder for Led Retrofit lamps. The computer-aided-design of the parabolic reflector provides a quality light distribution. The housing is dust and water protected through the extensive engineering design and testing. CORE is recommended to illuminate columns, facades, walkways, parks and various architectural design works. The pole lights give a great level of downward light with symmetric wide beam, asymmetric forward throw or side throw light distributions.



Technical Data



Ordering Code: 7227-I-4-536-XX

Lamp: LED

Beam: T2 - Asymmetric Long Side Throw

CCT: 4000 K CRI: CRI >80 SDCM: SDCM = 3Lamp Lumen: 2x6110 lm Luminaire Lumen : 8340 lm Lamp Wattage: 2x55 W Luminaire Wattage: 116 W Efficacy: 71 lm/W Ambient Temperature : 50°C

Lumen Maintenance L80B10 >108,000 h

Controller: DIM 1-10V

Input Voltage: 220-240Vac 50/60Hz

Net Weight: 26.20 kg.

Ordering code guide XXXX-X-X-XXX-XX Product Code Reflector C D Electrical Component



Lamp Color

Icon definition

Tel: +66[0]2 943 2420-1, +66[0]2 946 4170-1

MAXI CORE OPTIC - POLE LIGHT / **DOUBLE SIDED**

POLE MOUNTED LIGHT

Unilamp

LAST UPDATE: 21-10-2025

Specification

IEC Standard IEC 60598-1 General Requirement

IEC 60598-2-1 Fixed Luminaires

Protection IP65 Class I

Protection against mechanical impact IKO8 on body and IKO7 optical part. IK Rating

Luminaires Body Housing High-pressure die cast aluminum alloy body and components.

Extruded aluminum S6063 alloy body with low copper content.

Nano Ceramic surface conversion, resistant to corrosive environment. Luminiare primarily coated with epoxy resin and top coated **Coating Process**

with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.

Diffuser Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.

Lens Molded PC lens from renowned manufacturers in various light distribution patterns.

Gasket Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.

External Screws External screws are in stainless steel with protection grease.

Cable Entry Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 7-10mm. diameter. Led

High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat

conductive material.

Driver High quality Dimmable Driver (1-10V) in constant current. Conform to applicable safety standards and electromagnetic compatibility.

The luminaire is equipped with a 10kV surge protection device, the function of the protector is indicated by a LED, performance in **Enhanced Protection**

compliance with IEC61643-11.

Internal Wire Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.

Terminal Block Terminal block in GFR PA6.6 for cable with cross section up to 4 sqmm. VDE approved.


Class1 luminaire provided with the earth connection.


Installation work has to be carried on according to the enclosed installation manual. Caution

Color

Black 01 Graphite 02 Dark Grey 03 Aluminum Silver 04 White 06

Light Distribution






MAXI CORE OPTIC - POLE LIGHT / DOUBLE SIDED

POLE MOUNTED LIGHT



LAST UPDATE: 21-10-2025

Bug Report

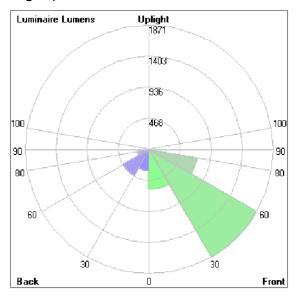

Lum. Classification System (LCS)				
LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	602.4	4.9	14.5
FM	[30-60]	1871.3	15.3	44.9
FH	[60-80]	726.5	5.9	17.4
FVH	[80-90]	15.4	0.1	0.4
BL	[0-30]	319.4	2.6	7.7
ВМ	[30-60]	446.5	3.7	10.7
BH	[60-80]	177.6	1.5	4.3
BVH	[80-90]	7.9	0.1	0.2
UL	[90-100]	0.0	0.0	0.0
UH	[100-180]	0.0	0.0	0.0
Total		4167.0	34.1	100.0
BUG Rat	ing	B1-U0-G1	I	

MAXI CORE OPTIC - POLE LIGHT / DOUBLE SIDED

POLE MOUNTED LIGHT

& Unilamp

LAST UPDATE: 21-10-2025

Accessories



Ordering Code: AUN-ACB-0006-00 Anchor bolt kit