
Maxi core optic - pole light / Double sided

POLE MOUNTED LIGHT

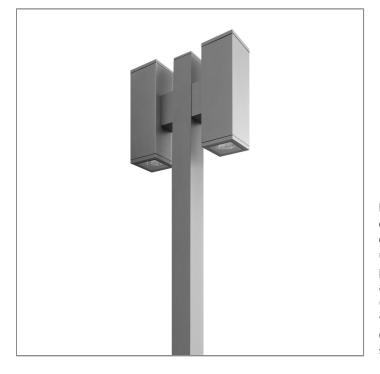

Unilamp

LAST UPDATE: 03-09-2025


Characterized by clean and clear-cut lines CORE is a family of square wall light, ceiling light, bollard and pole lights. CORE is available in two sizes and equipped with COB LED/ High Power LED in three color temperatures with exceptional color consistency. It is also available in HID version as well as with E27 holder for Led Retrofit lamps. The computer-aided-design of the parabolic reflector provides a quality light distribution. The housing is dust and water protected through the extensive engineering design and testing. CORE is recommended to illuminate columns, facades, walkways, parks and various architectural design works. The pole lights give a great level of downward light with symmetric wide beam, asymmetric forward throw or side throw light distributions.

Technical Data



Ordering Code :	7227-J-3-534-XX
Lamp :	LED
Beam :	Asymmetric
CCT :	2700 K
CRI :	CRI >80
SDCM :	SDCM = 3
Lamp Lumen :	2x5710 lm
Luminaire Lumen :	7020 lm
Lamp Wattage :	2x55 W
Luminaire Wattage :	116 W
Efficacy :	60 lm/W
Ambient Temperature :	50°C
Lumen Maintenance	L80B10 >108,000 h
Controller :	On-Off
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	26.20 kg.





Icon definition

150

500

50

100x100

250

Unilamp Co., Ltd. 461 Ramintra Road, Kannayao, Bangkok 10230 Thailand Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1 Fax : +66[0]2 943 2419 Fax : +66[0]2 943 2419 online@unilamp.co.th www.unilamp.co.th

Maxi core optic - pole light / Double sided

POLE MOUNTED LIGHT


Unilamp

LAST UPDATE: 03-09-2025


Specification

IEC Standard	IEC 60598–1 General Requirement			
	IEC 60598-2-1 Fixed Luminaires			
Protection	IP65 Class I			
IK Rating	Protection against mechanical impact IKO8 on body and IKO7 optical part.			
Luminaires Body Housing	High-pressure die cast aluminum alloy body and components.			
	Extruded aluminum S6063 alloy body with low copper content.			
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminiare primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.			
Diffuser	Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.			
Lens	Molded PC lens from renowned manufacturers in various light distribution patterns.			
Gasket	Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.			
External Screws	External screws are in stainless steel with protection grease.			
Cable Entry	Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 7-10mm. diameter.			
Led	High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.			
Driver	High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard.			
Enhanced Protection	The luminaire is equipped with a 10kV surge protection device, the function of the protector is indicated by a LED, performance in compliance with IEC61643–11.			
Internal Wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.			
Terminal Block	Terminal block in GFR PA6.6 for cable with cross section up to 4 sqmm. VDE approved.			
	Class1 luminaire provided with the earth connection.			
Caution	Installation work has to be carried on according to the enclosed installation manual.			
Color	Black 01 Graphite 02 Dark Grey 03 Aluminum Silver 04			

Light Distribution



White 06



Back

Maxi core optic - pole light / Double sided

POLE MOUNTED LIGHT

LAST UPDATE: 03-09-2025

Bug Report Luminaire Lumens U<u>pli</u>ght 1756 1317 878 100 439 100 90 90 80 80 60 60 30 30

0

Front

Lum. Cla	assification Sy	stem (LCS)		
LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	467.1	4.1	13.3
FM	[30-60]	1756.5	15.4	50.1
FH	[60-80]	587.6	5.1	16.7
FVH	[80-90]	11.0	0.1	0.3
BL	[0-30]	208.4	1.8	5.9
BM	[30-60]	388.6	3.4	11.1
BH	[60-80]	81.8	0.7	2.3
BVH	[80-90]	7.2	0.1	0.2
UL	[90-100]	0.0	0.0	0.0
UH	[100–180]	0.0	0.0	0.0
Total		3508.2	30.7	100.0
BUG Rating B1–U0–G1				

MAXI CORE OPTIC - POLE LIGHT / DOUBLE SIDED

POLE MOUNTED LIGHT

LAST UPDATE: 03-09-2025

Accessories



Ordering Code: AUN-ACB-0006-00 Anchor bolt kit

