

EPSYLON

EPSYLON – POLE TOP LIGHT / DOUBLE HEAD


POLE LIGHTS & POLE TOP LIGHTS



LAST UPDATE: 19-02-2024



EPSYLON is the family of pole top and wall mount luminaires with unshielded symmetrical distribution. High quality PMMA material is used to avoid discoloration of the diffuser. EPSYLON gives a broad spread light distribution with low glare. This luminaire is generally used to illuminate gardens, parks, pedestrian, squares and open spaces. It is assembled with high brightness LEDs. EPSYLON with traditional HID light source and E27 holder for Led retrofit lamps are also available. The recommended mounting height is between 3 – 5 meters. Available as an option are Aluminium Poles, Galvanized steel poles and anchorage unit for concrete foundations.



Technical Data



Ordering Code :	7236-0-3-713-XX
Lamp :	HIE-CE
Socket	E27
CCT :	3000-4200 K
Lamp Lumen :	2x13000 lm
Luminaire Lumen :	26000 lm
Lamp Wattage :	2x150 W
Luminaire Wattage :	300 W
Ambient Temperature :	25°C
Controller :	On-Off
Input Voltage :	230Vac 50Hz
Net Weight :	25.20 kg.

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

A Product Code
B Reflector
C Electrical Component
D Lamp
E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

EPSYLON

EPSYLON – POLE TOP LIGHT / DOUBLE HEAD

POLE LIGHTS & POLE TOP LIGHTS





LAST UPDATE: 19-02-2024

Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires												
Protection	IP54 Class I												
IK Rating	Protection against mechanical impact IK08 on body and IK06 optical part.												
Luminaires Body Housing	High-pressure Die Cast Aluminium alloy body and components. Spun Aluminium alloy component.												
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.												
Diffuser	Weather resistant injected prismatic PMMA cover.												
Gasket	Weather resistant silicone gasket. Working temperature -40°C to +200°C.												
External Screws	External screws are in stainless steel with protection grease.												
Lamp Holder	E27 lampholder in ceramic body. VDE/ ENEC approved.												
Ballast	Vacuum impregnated magnetic ballast for HID lamp. ENEC approved.												
Capacitor	Aluminium case capacitor with over pressure safety device. ENEC approved.												
Ignitor	Electronic ignitor with automatic switch-off function. ENEC approved.												
Internal Wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C. HID control gear wired with double insulated silicone cable and compatible to be operated under ignition voltage up to 5KV.												
Terminal Block	Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved. Class1 luminaire provided with the earth connection.												
Caution	Installation work has to be carried on according to the enclosed installation manual.												
Color	<table><tr><td></td><td>Black 01</td></tr><tr><td></td><td>Graphite 02</td></tr><tr><td></td><td>Dark Grey 03</td></tr><tr><td></td><td>Aluminium Silver 04</td></tr><tr><td></td><td>White 06</td></tr><tr><td></td><td>Wooden Brown 07</td></tr></table>		Black 01		Graphite 02		Dark Grey 03		Aluminium Silver 04		White 06		Wooden Brown 07
	Black 01												
	Graphite 02												
	Dark Grey 03												
	Aluminium Silver 04												
	White 06												
	Wooden Brown 07												

Light Distribution



*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

EPSYLON

EPSYLON – POLE TOP LIGHT / DOUBLE HEAD


POLE LIGHTS & POLE TOP LIGHTS



Unilamp

LAST UPDATE: 19-02-2024

Bug Report

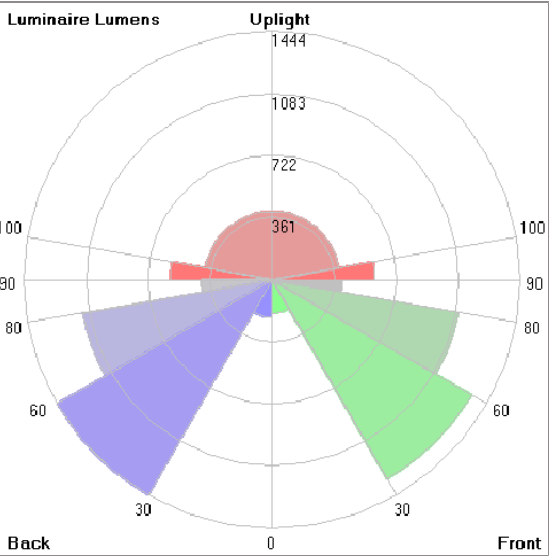

Lum. Classification System (LCS)				
LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	195.7	1.5	2.7
FM	[30-60]	1337.4	10.3	18.5
FH	[60-80]	1097.0	8.4	15.2
FVH	[80-90]	406.3	3.1	5.6
BL	[0-30]	218.9	1.7	3.0
BM	[30-60]	1443.8	11.1	20.0
BH	[60-80]	1120.1	8.6	15.5
BVH	[80-90]	412.2	3.2	5.7
UL	[90-100]	594.1	4.6	8.2
UH	[100-180]	394.7	3.0	5.5
Total		7220.2	55.5	100.0
BUG Rating		B3-U4-G3		

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

EPSYLON

EPSYLON – POLE TOP LIGHT / DOUBLE HEAD

POLE LIGHTS & POLE TOP LIGHTS



LAST UPDATE: 19-02-2024

Accessories



Ordering Code:

ALUMINIUM-POLE-EPSYLON-DOUBLE

Please contact Sales
Representative



Ordering Code:

STEEL-POLE-EPSYLON-DOUBLE

Please contact Sales
Representative



Ordering Code:

AUN-ACB-0008-00

Anchor Bolt Kit for
Galvanized Steel Pole. [for
Diameter 102mm. and
151x102mm.]



Ordering Code:

AUN-ACB-0005-00

Anchor Bolt Kit for
Aluminium Pole