

AURA

AURA


POLE MOUNTED LIGHT



LAST UPDATE: 01-04-2026



AURA is a louvered pole-top luminaire designed to deliver comfortable, symmetrical light distribution for outdoor environments. With a recommended mounting height of 3–4 meters, it provides effective medium-level illumination suitable for walkways, gardens, parks, open spaces, and commercial landscapes. The fixture supports E27 lamp bases, accommodating retrofit LED or compact fluorescent lamps, offering flexibility and energy efficiency. An internal glare-suppression louver enhances visual comfort by reducing glare and minimizing upward light emission, while the top-reflecting disc directs light downwards for improved uniformity. A durable PMMA cover safeguards the lamp compartment against dust and water ingress, ensuring long-lasting performance. AURA can be combined with galvanized steel poles and anchorage units for reliable installation, making it an elegant and practical choice for public and residential outdoor lighting.

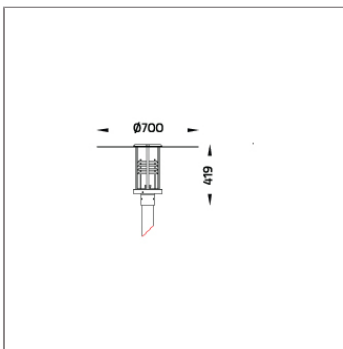

Technical Data



Ordering Code :	7701-0-2-407-XX
Lamp :	Led Retrofit E27
Socket :	E27
CCT :	2700-6500 K
Lamp Wattage :	9-12 W
Ambient Temperature :	25°C
Controller :	On-Off
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	- kg.

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

AURA

AURA






POLE MOUNTED LIGHT





LAST UPDATE: 01-04-2026

Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires
Protection	IP65 Class I
Luminaires Body Housing	Premium high-strength cast aluminum component for durability and performance. Extruded 6063 aluminum body with minimal copper content for corrosion resistance.
Coating Process	Durable UV-resistant polyester powder coat for outdoor applications.
Diffuser	High-performance weather-resistant extruded PMMA with hardened coating.
Reflector	Precision-engineered aluminum louvers reduce glare and enhance control.
Gasket	High-durability silicone gasket for long-lasting sealing performance.
External Screws	Durable stainless steel screws with anti-corrosion grease for extended lifespan.
Lamp Holder	Certified E27 ceramic lampholder designed for high-temperature applications.
Pre-Wire Cable	Certified pre-wired 3x0.75 sqmm cable, featuring HO5RN-F neoprene insulation.
Caution	Installation must be performed as per the provided installation instructions.

Color	 Black O1
	 Graphite O2
	 Dark Grey O3
	 Aluminum Silver O4
	 White O6

Light Distribution

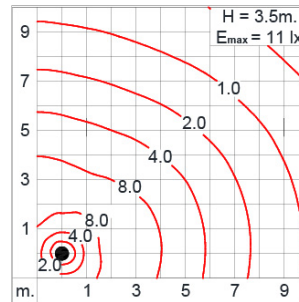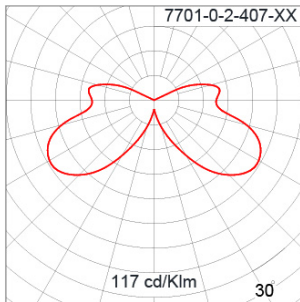

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

AURA


AURA

POLE MOUNTED LIGHT



LAST UPDATE: 01-04-2026

Bug Report

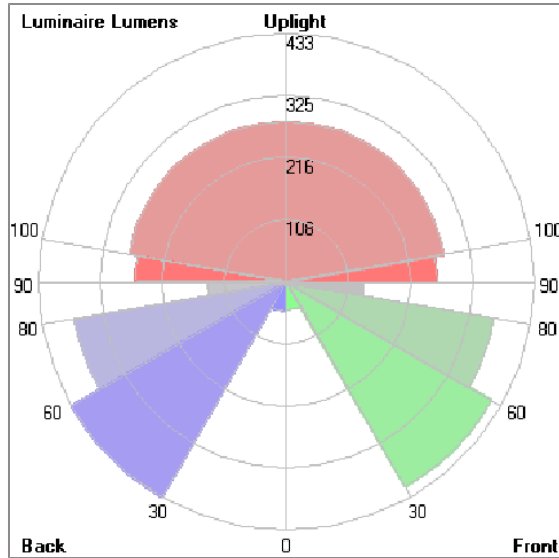

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	49.1	1.2	2.0
FM	[30-60]	412.8	10.3	16.5
FH	[60-80]	366.9	9.2	14.7
FVH	[80-90]	134.1	3.4	5.4
BL	[0-30]	51.8	1.3	2.1
BM	[30-60]	432.7	10.8	17.3
BH	[60-80]	374.6	9.4	15.0
BVH	[80-90]	135.5	3.4	5.4
UL	[90-100]	262.2	6.6	10.5
UH	[100-180]	278.3	7.0	11.1
Total		2498.0	62.6	100.0
BUG Rating		B1-U3-G2		

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

AURA

AURA

POLE MOUNTED LIGHT




LAST UPDATE: 01-04-2026


Accessories



Ordering Code:
AUN-ACB-0013-00
Anchor bolt kit



Ordering Code:
ALU-POL-0001-XX
Cylindrical aluminum pole,
diameter 76mm, H=
3000mm



Ordering Code:
ALU-POL-0002-XX
Cylindrical aluminum pole,
diameter 76mm, H=
4000mm

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th