

# EQUINOX

## NEO EQUINOX – POLE-TOP LIGHT / DOUBLE SIDED


### POLE LIGHT & POLE TOP LIGHT



LAST UPDATE: 08-11-2023



EQUINOX is the trapezium-shaped linear light fixture for residential community, commercial area and public space. It is operated with the LED light source with high CRI and 3-step SDCM. It can be used on a pole as a pole top luminaire or with a clamping unit at different height. A wall mounted version for area light application is also available. With high quality LED in 3000K and 4000K EQUINOX is an economical luminaire that provides general illumination with excellent lighting levels. The exceptional lens system distributes the light efficiently onto the surfaces. Aluminium Poles, Galvanized steel poles and anchorage unit for concrete foundations are available as accessories.



### Technical Data



|                       |                    |
|-----------------------|--------------------|
| Ordering Code :       | 7718-E-3-666-XX    |
| Lamp :                | LED                |
| Beam :                | 90°                |
| CCT :                 | 3000 K             |
| CRI :                 | CRI >80            |
| SDCM :                | SDCM = 3           |
| Lamp Lumen :          | 2x5760 lm          |
| Luminaire Lumen :     | 9360 lm            |
| Lamp Wattage :        | 2x32 W             |
| Luminaire Wattage :   | 72 W               |
| Efficacy :            | 130 lm/W           |
| Ambient Temperature : | 50°C               |
| Lumen Maintenance     | L80B10 >70,000 h   |
| Controller :          | On-Off             |
| Input Voltage :       | 220-240Vac 50/60Hz |
| Net Weight :          | 12.00 kg.          |

### Ordering code guide

XXXX-X-X-XXX-XX  
A B C D E

A Product Code  
B Reflector  
C Electrical Component  
D Lamp  
E Color



Icon definition

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1  
Fax : +66(0)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

# EQUINOX

## NEO EQUINOX – POLE-TOP LIGHT / DOUBLE SIDED

### POLE LIGHT & POLE TOP LIGHT





LAST UPDATE: 08-11-2023

#### Specification

|                         |  |  |          |  |             |  |              |  |                     |  |          |  |                 |
|-------------------------|--|--|----------|--|-------------|--|--------------|--|---------------------|--|----------|--|-----------------|
| IEC Standard            | IEC 60598-1 General Requirement<br>IEC 60598-2-1 Fixed Luminaires  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Protection              | IP66 Class I   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| IK Rating               | Protection against mechanical impact IK08 on body and IK07 optical part.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Luminaires Body Housing | High-pressure Die Cast Aluminium alloy body and components.<br>Extruded Aluminium S6063 alloy body with low copper content.  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Coating Process         | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.                          |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Diffuser                | Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Lens                    | Molded PC lens from renowned manufacturers in various light distribution patterns.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Gasket                  | Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| External Screws         | External screws are in stainless steel with protection grease.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Cable Entry             | Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 6-13mm. diameter.  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Led                     | High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Driver                  | High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Enhanced Protection     | The luminaire is equipped with a 10kV surge protection device, the function of the protector is indicated by a LED, performance in compliance with IEC61643-11.  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Internal Wire           | Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Terminal Block          | Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Pre-Wire Cable          | Pre-wired with 3x1.0 sqmm. HO7RN-F neoprene cable. IMQ approved.   |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Caution                 | Installation work has to be carried on according to the enclosed installation manual.  |  |          |  |             |  |              |  |                     |  |          |  |                 |
| Color                   | <table><tr><td></td><td>Black 01</td></tr><tr><td></td><td>Graphite 02</td></tr><tr><td></td><td>Dark Grey 03</td></tr><tr><td></td><td>Aluminium Silver 04</td></tr><tr><td></td><td>White 06</td></tr><tr><td></td><td>Wooden Brown 07</td></tr></table> |  | Black 01 |  | Graphite 02 |  | Dark Grey 03 |  | Aluminium Silver 04 |  | White 06 |  | Wooden Brown 07 |
|                         | Black 01   |  |          |  |             |  |              |  |                     |  |          |  |                 |
|                         | Graphite 02  |  |          |  |             |  |              |  |                     |  |          |  |                 |
|                         | Dark Grey 03   |  |          |  |             |  |              |  |                     |  |          |  |                 |
|                         | Aluminium Silver 04  |  |          |  |             |  |              |  |                     |  |          |  |                 |
|                         | White 06   |  |          |  |             |  |              |  |                     |  |          |  |                 |
|                         | Wooden Brown 07  |  |          |  |             |  |              |  |                     |  |          |  |                 |

#### Light Distribution



\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1  
Fax : +66(0)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

# EQUINOX

## NEO EQUINOX – POLE-TOP LIGHT / DOUBLE SIDED


### POLE LIGHT & POLE TOP LIGHT



Unilamp

LAST UPDATE: 08-11-2023

#### Bug Report

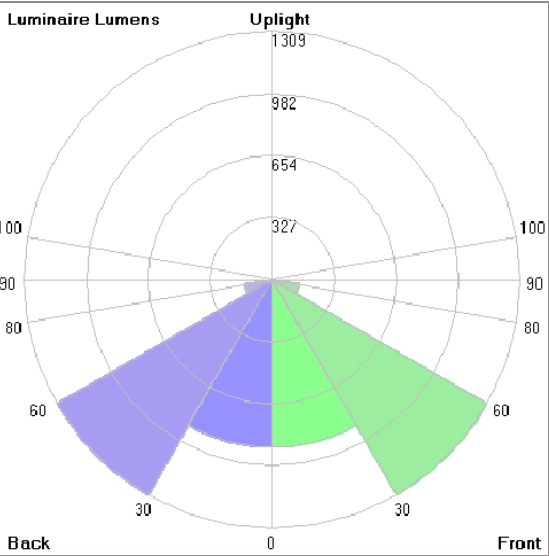

| Lum. Classification System (LCS) |           |          |       |       |
|----------------------------------|-----------|----------|-------|-------|
| LCS                              | Zone      | %Lumens  | %Lamp | %Lum  |
| FL                               | [0-30]    | 883.4    | 15.3  | 18.9  |
| FM                               | [30-60]   | 1308.8   | 22.7  | 28.0  |
| FH                               | [60-80]   | 144.3    | 2.5   | 3.1   |
| FVH                              | [80-90]   | 2.8      | 0.0   | 0.1   |
| BL                               | [0-30]    | 883.4    | 15.3  | 18.9  |
| BM                               | [30-60]   | 1308.8   | 22.7  | 28.0  |
| BH                               | [60-80]   | 144.3    | 2.5   | 3.1   |
| BVH                              | [80-90]   | 2.8      | 0.0   | 0.1   |
| UL                               | [90-100]  | 0.0      | 0.0   | 0.0   |
| UH                               | [100-180] | 0.9      | 0.0   | 0.0   |
| Total                            |           | 4679.5   | 81.0  | 100.0 |
| BUG Rating                       |           | B2-U1-G0 |       |       |

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

# EQUINOX

## NEO EQUINOX – POLE-TOP LIGHT / DOUBLE SIDED

### POLE LIGHT & POLE TOP LIGHT



LAST UPDATE: 08-11-2023

#### Accessories



Ordering Code:  
AUN-ACB-0009-00  
Anchor Bolt Kit for  
Galvanized Steel Pole. (for  
pole Diameter 114mm. and  
Diameter 114&140mm.)



Ordering Code:  
AUN-ACB-0008-00  
Anchor Bolt Kit for  
Galvanized Steel Pole. (for  
Diameter 102mm. and  
151x102mm.)



Ordering Code:  
AUN-ACB-0005-00  
Anchor Bolt Kit for  
Aluminium Pole



Ordering Code:  
ALUMINIUM-POLE-NEO-EQUINOX-POLE-TOP  
Please contact Sales  
Representative



Ordering Code:  
STEEL-POLE-NEO-EQUINOX-POLE-TOP  
Please contact Sales  
Representative

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th