

KRONOS

KRONOS – AREA LIGHT / BI-SYMMETRIC DOUBLE SIDED


POLE MOUNTED LIGHT



LAST UPDATE: 09-04-2026



A family of Area Light, Surface Washer and Architectural-Grade Flood Light in various mounting application KRONOS utilizes the latest LED technology from renowned manufacturers with high CRI in 3000K or 4000K. The high quality corrosion resistance aluminium housing is filmed with Nano Ceramic and coated with super durable powder. The heat management has been delicately designed and tested under ambient thermal condition Ta 50°C. A graduated scale provides accurate aiming of the luminaire. KRONOS offers various light distribution patterns e.g. Asymmetric Flat Beam (Road Optic) for USA, European, Middle East and Asia regulations, Asymmetric Forward Throw for squares and open spaces, as well as Narrow, Medium, Wide and Elliptical beams for floodlight and façade light applications.

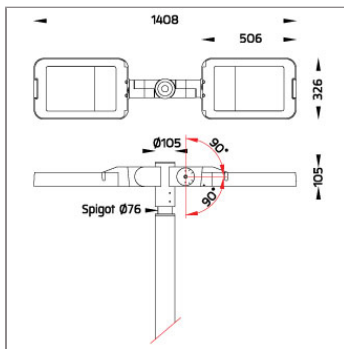

Technical Data



Ordering Code :	7774-G-5-669-XX
Lamp :	LED
Beam :	155°
CCT :	4000 K
CRI :	CRI >80
SDCM :	SDCM = 3
Lamp Lumen :	2x24320 lm
Luminaire Lumen :	32960 lm
Lamp Wattage :	2x127 W
Luminaire Wattage :	272 W
Efficacy :	121 lm/W
Ambient Temperature :	50°C
Lumen Maintenance	L70B10 >72,000 h
Controller :	DALI
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	15.60 kg.

Ordering code guide

XXXX-X-X-XXX-XX

A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

KRONOS


KRONOS – AREA LIGHT / BI-SYMMETRIC
DOUBLE SIDED

POLE MOUNTED LIGHT



LAST UPDATE: 09-04-2026

Bug Report

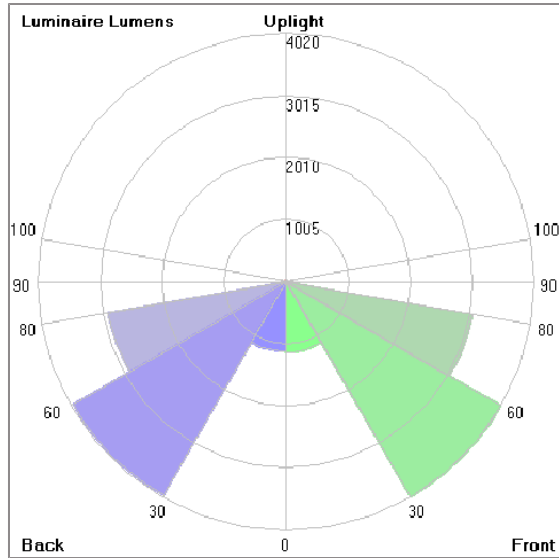

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	1144.0	4.7	6.9
FM	[30-60]	4019.8	16.5	24.4
FH	[60-80]	3051.3	12.5	18.5
FVH	[80-90]	110.8	0.5	0.7
BL	[0-30]	1129.4	4.6	6.9
BM	[30-60]	3984.4	16.4	24.2
BH	[60-80]	2924.1	12.0	17.7
BVH	[80-90]	88.9	0.4	0.5
UL	[90-100]	5.0	0.0	0.0
UH	[100-180]	22.7	0.1	0.1
Total		16480.4	67.7	100.0
BUG Rating		B4-U2-G2		

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

KRONOS

KRONOS – AREA LIGHT / BI-SYMMETRIC
DOUBLE SIDED

POLE MOUNTED LIGHT



LAST UPDATE: 09-04-2026

Accessories



Ordering Code:
STEEL-POLE-FOR-KRONOS
Please contact Sales
Representative



Ordering Code:
AUN-ACB-0009-00
Anchor bolt kit, pole
diameter 114 and 114/140,
galvanized steel pole

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th