

# KORNER

## KORNER2

### POLE MOUNTED



LAST UPDATE: 18-06-2024



KORNER is minimalistic linear shaped pole luminaire and wall light. The use of clear lines, closed surfaces and hidden mounting hardware provide an attractive unobtrusive appearance, and easy installation. The unique 16 stage paint process and use of virtually copper free aluminum alloys guarantee an ultra-long product lifetime. KORNER is suitable for medium mounting heights when using aluminum poles and high mounting heights of up to 8m in combination of steel poles. Existing circular poles can be utilized with the use of the innovative clamping system. KORNER uses high efficacy LED modules and CAD optimized optics. Ready for light management systems using the D4i protocol and Zhaga book 18 interface. Withstanding ambient temperatures of 50°C and electrical surges make KORNER applicable for most challenging environments.



### Technical Data



|                       |                    |
|-----------------------|--------------------|
| Ordering Code :       | 7781-I-4-668-XX    |
| Lamp :                | LED                |
| Beam :                | T2                 |
| CCT :                 | 3000 K             |
| CRI :                 | CRI >80            |
| SDCM :                | SDCM = 3           |
| Lamp Lumen :          | 11520 lm           |
| Luminaire Lumen :     | 7260 lm            |
| Lamp Wattage :        | 64 W               |
| Luminaire Wattage :   | 70 W               |
| Efficacy :            | 103 lm/W           |
| Ambient Temperature : | 40°C               |
| Lumen Maintenance     | L70B10 >60,000 h   |
| Controller :          | DIM 1-10V          |
| Input Voltage :       | 220-240Vac 50/60Hz |
| Net Weight :          | - kg.              |

#### Ordering code guide

XXXX-X-X-XXX-XX

A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition



\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(O)2 943 2420-1, +66(O)2 946 4170-1  
Fax : +66(O)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

### Specification

|   |   |   |          |   |             |   |              |   |                    |   |          |   |                 |
|---|---|---|----------|---|-------------|---|--------------|---|--------------------|---|----------|---|-----------------|
| IEC Standard  | IEC 60598-1 General Requirement<br>IEC 60598-2-1 Fixed Luminaires   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Protection  | IP66 Class I  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| IK Rating   | Protection against mechanical impact IK10 on body and IK08 on optical part.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Luminaires Body Housing   | Extruded aluminum 56063 alloy body with low copper content.<br>High-pressure die cast aluminum alloy body and components.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Coating Process   | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Diffuser  | Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Lens  | Molded PC lens from renowned manufacturers in various light distribution patterns.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Gasket  | Weather resistant silicone gasket. Working temperature -40°C to +200°C.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| External Screws   | External screws are in stainless steel with protection grease.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Cable Entry   | Cable entry protected by M20 cable gland. To be used with H05RN-F/ H07RN-F cable with 7-13mm. diameter.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Led   | High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Driver  | High quality Dimmable Driver (1-10V) in constant current. Conform to applicable safety standards and electromagnetic compatibility.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Enhanced Protection   | The luminaire is equipped with a 10kV surge protection device, the function of the protector is indicated by a LED, performance in compliance with IEC61643-11.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Internal Wire   | Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Terminal Block  | Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.<br>Class1 luminaire provided with the earth connection.  |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Pre-Wire Cable  | Pre-wired with 5-core cable for power (3x1 sqmm.) and dimming signal (2x1 sqmm.).   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Caution   | Installation work has to be carried on according to the enclosed installation manual.   |   |          |   |             |   |              |   |                    |   |          |   |                 |
| Color   | <table border="0"> <tr> <td></td> <td>Black O1</td> </tr> <tr> <td></td> <td>Graphite O2</td> </tr> <tr> <td></td> <td>Dark Grey O3</td> </tr> <tr> <td></td> <td>Aluminum Silver O4</td> </tr> <tr> <td></td> <td>White O6</td> </tr> <tr> <td></td> <td>Wooden Brown O7</td> </tr> </table> |  | Black O1 |  | Graphite O2 |  | Dark Grey O3 |  | Aluminum Silver O4 |  | White O6 |  | Wooden Brown O7 |
|  | Black O1  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Graphite O2   |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Dark Grey O3  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Aluminum Silver O4  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | White O6  |   |          |   |             |   |              |   |                    |   |          |   |                 |
|  | Wooden Brown O7   |   |          |   |             |   |              |   |                    |   |          |   |                 |

### Light Distribution



# KORNER


KORNER2

POLE MOUNTED



LAST UPDATE: 18-06-2024

## Bug Report

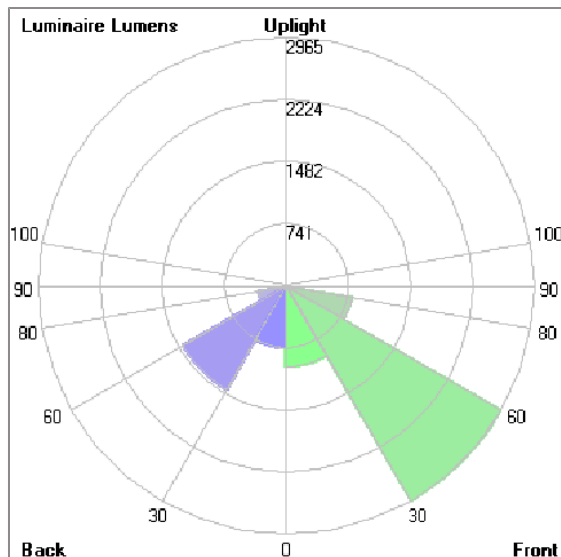

### Lum. Classification System [LCS]

| LCS        | Zone      | %Lumens  | %Lamp | %Lum  |
|------------|-----------|----------|-------|-------|
| FL         | [0-30]    | 963.9    | 8.4   | 13.3  |
| FM         | [30-60]   | 2964.9   | 25.7  | 40.9  |
| FH         | [60-80]   | 793.8    | 6.9   | 10.9  |
| FVH        | [80-90]   | 4.5      | 0.0   | 0.1   |
| BL         | [0-30]    | 743.8    | 6.5   | 10.2  |
| BM         | [30-60]   | 1431.0   | 12.4  | 19.7  |
| BH         | [60-80]   | 346.9    | 3.0   | 4.8   |
| BVH        | [80-90]   | 3.9      | 0.0   | 0.1   |
| UL         | [90-100]  | 0.3      | 0.0   | 0.0   |
| UH         | [100-180] | 4.7      | 0.0   | 0.1   |
| Total      |           | 7257.7   | 62.9  | 100.0 |
| BUG Rating |           | B2-U1-G1 |       |       |

\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

# KORNER

## KORNER2

### POLE MOUNTED



LAST UPDATE: 18-06-2024

#### Accessories



Ordering Code:  
AUN-CON-0011-00  
IP68 connection device,  
cable diameter 7.1-13mm,  
1-10V or DALI



Ordering Code:  
AUN-CON-0012-00  
IP68 connection device 5  
pole, cable diameter  
7.1-13mm, with distribution  
block, 1-10V or DALI



Ordering Code:  
AUN-CON-0014-00  
IP68 connection device,  
cable diameter 8-12.5mm,  
1-10V or DALI



Ordering Code:  
AUN-ACB-0008-00  
Anchor bolt kit, pole  
diameter 102mm and  
151x102mm, galvanized  
steel pole



Ordering Code:  
AUN-ACB-0022-00  
Anchor bolt kit, aluminum  
pole



Ordering Code:  
AUN-ACB-0023-00  
Planted root, aluminum  
pole



Ordering Code:  
AUN-ACB-0024-00  
Planted root, galvanized  
steel pole



Ordering Code:  
AUN-CLP-0010-XX  
Pole clamp, pole diameter  
60mm, single side  
luminaire mounting



Ordering Code:  
AUN-CLP-0011-XX  
Pole clamp, pole diameter  
60mm, double sided  
luminaire mounting



Ordering Code:  
AUN-CLP-0012-XX  
Pole clamp, pole diameter  
76mm, single side  
luminaire mounting



Ordering Code:  
AUN-CLP-0013-XX  
Pole clamp, pole diameter  
76mm, double sided  
luminaire mounting



Ordering Code:  
AUN-BRK-0004-XX  
Mounting bracket

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1  
Fax : +66(0)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

# KORNER

KORNER2

POLE MOUNTED



LAST UPDATE: 18-06-2024



Ordering Code:  
ALUMINUM-POLE-FOR-KORNER  
Please contact Sales  
Representative



Ordering Code:  
STEEL-POLE-FOR-KORNER  
Please contact Sales  
Representative

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th