


CHARISMA

MINI CHARISMA SQUARE


BOLLARD



LAST UPDATE: 24-02-2025

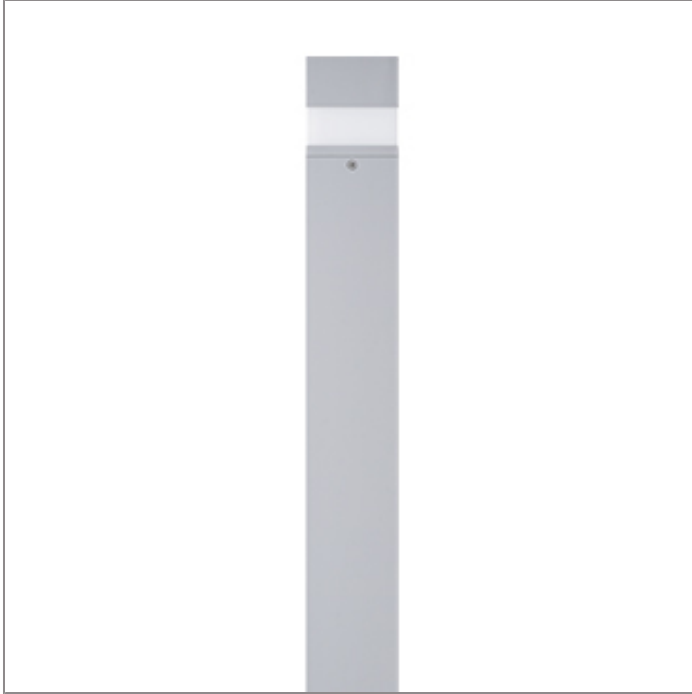

CHARISMA range of compact to mid-size bollard and wall light designed for residential, community and commercial sites. It is pre-wired from the factory with double insulated construction therefore safe and simple to install. CHARISMA is designed to utilize a high efficiency reflector and COB LED and available in three color temperatures from 2700K, 3000K and 4000K. It is supplied with built-in driver in both non-dimmable and 1-10V/ DALI dimmable options. The clear polycarbonate cover with internal glare suppression louvers improves the light quality by limiting the upward light emission. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.



Technical Data



Ordering Code :	7826-0-5-901-XX
Lamp :	LED
CCT :	3000 K
CRI :	CRI >80
SDCM :	SDCM = 3
Lamp Lumen :	1850 lm
Luminaire Lumen :	410 lm
Lamp Wattage :	12 W
Luminaire Wattage :	14 W
Efficacy :	29 lm/W
Ambient Temperature :	40°C
Lumen Maintenance	L70B10 >60,000 h
Controller :	DALI
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	3.80 kg.

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

CHARISMA


MINI CHARISMA SQUARE

BOLLARD



LAST UPDATE: 24-02-2025

Bug Report

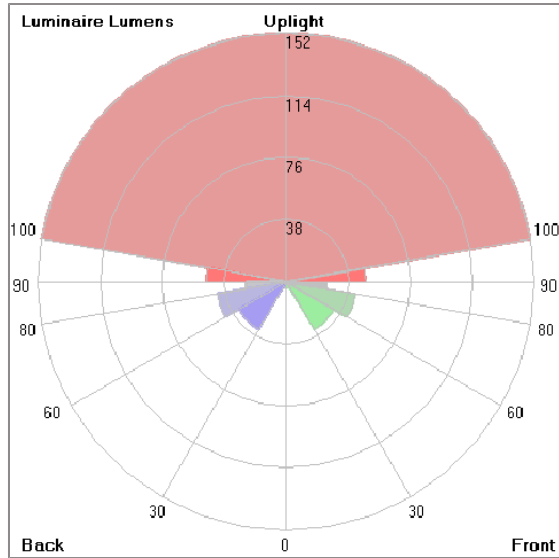

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	3.9	0.2	1.0
FM	[30-60]	33.6	2.1	8.2
FH	[60-80]	42.8	2.7	10.4
FVH	[80-90]	24.5	1.6	6.0
BL	[0-30]	3.9	0.2	1.0
BM	[30-60]	33.6	2.1	8.2
BH	[60-80]	42.8	2.7	10.4
BVH	[80-90]	24.5	1.6	6.0
UL	[90-100]	48.6	3.1	11.9
UH	[100-180]	151.7	9.6	37.0
Total		409.9	25.9	100.0
BUG Rating				BO-U3-G1

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

CHARISMA

MINI CHARISMA SQUARE

BOLLARD



LAST UPDATE: 24-02-2025

Accessories



Ordering Code:
AUN-ACB-0015-00
Anchor bolt kit, bollard



Ordering Code:
AUN-CON-0011-00
IP68 connection device,
cable diameter 7.1-13mm,
1-10V or DALI



Ordering Code:
AUN-CON-0012-00
IP68 connection device 5
pole, cable diameter
7.1-13mm, with distribution
block, 1-10V or DALI



Ordering Code:
AUN-CON-0014-00
IP68 connection device,
cable diameter 8-12.5mm,
1-10V or DALI