

# SKUNA

## MEDIUM SKUNA


### BOLLARD



LAST UPDATE: 18-11-2025



A new compact bollard and wall luminaire family featuring robust aluminium housing with various type of light distribution. SKUNA utilized LED modules from renowned manufacturer with high precision optical lenses which offer narrow beam, medium beam, wide beam, forward throw and side throw light distribution. Featuring screw-less design housing made from copper free LM6 die-cast aluminium and S6063 extruded aluminium with Nano-Ceramic protection film for superior corrosion resistance. SKUNA is perfect for residential area as well as community-scale blocks.



## Technical Data



Ordering Code :	7848-I-3-567-XX
Lamp :	LED
Beam :	Side throw
CCT :	2700 K
CRI :	CRI >80
SDCM :	SDCM = 3
Lamp Lumen :	1220 lm
Luminaire Lumen :	830 lm
Lamp Wattage :	12 W
Luminaire Wattage :	14 W
Efficacy :	59 lm/W
Ambient Temperature :	40°C
Lumen Maintenance	L70B10 >60,500 h
Controller :	On-Off
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	- kg.

### Ordering code guide

XXXX-X-X-XXX-XX  
A B C D E

A Product Code  
B Reflector  
C Electrical Component  
D Lamp  
E Color



Icon definition

\*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66(O)2 943 2420-1, +66(O)2 946 4170-1  
Fax : +66(O)2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th



# SKUNA


MEDIUM SKUNA

BOLLARD



LAST UPDATE: 18-11-2025

## Bug Report

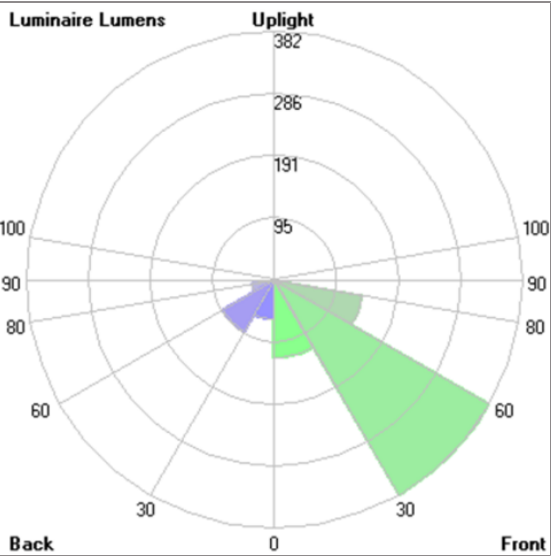

Lum. Classification System (LCS)				
LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	120.3	9.9	14.5
FM	[30-60]	381.7	31.3	46.0
FH	[60-80]	137.2	11.2	16.5
FVH	[80-90]	2.2	0.2	0.3
BL	[0-30]	61.2	5.0	7.4
BM	[30-60]	91.4	7.5	11.0
BH	[60-80]	34.8	2.8	4.2
BVH	[80-90]	0.7	0.1	0.1
UL	[90-100]	0.1	0.0	0.0
UH	[100-180]	0.3	0.0	0.0
Total		829.9	68.0	100.0
BUG Rating		BO-U1-GO		

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.