
LUXBEAT

LUXBEAT UNDERWATER 500


LINEAR LIGHT

LAST UPDATE: 08-04-2025



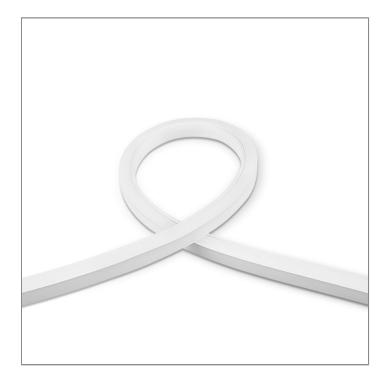

LuxBeat and LuxBeat XL are a range of miniature sized linear accent luminaires with flexible and fixed application. The patented optical system emits homogenous light regardless of the viewing direction. LuxBeat is the designer's choice for unconstraint creative light installations. High contrasting illumination of building elements is easily possible with the tiny luminaire dimensions and state of the art LED performance. The luminaire is top bendable and can be shortened on–site. The use of optional stainless steel mounting clips eliminates the time–consuming pretreatment of the installation surface. LuxBeat XL offers a robust aluminum housing that contains a wiring channel for the electrical connection. Bottom mounted in and out connector's assure shadow free easy installation. LuxBeat XL is available as fixed and tiltable surface mount luminaire, recessed wall and ceiling light, pendant light and inground uplighter. Shorter luminaire lengths are available upon request. LuxBeat XL RGBW requires the use of a 4 channel CV RGBW controller, contact the Unilamp sales team for details.



Technical Data



Ordering Code : 8114-0-2-269-00

Lamp: LED Beam: 120° CCT: 3000 K CRI: CRI >80 SDCM: SDCM = 3Luminaire Lumen: 390 lm Luminaire Wattage: 7 W Efficacy: 55 lm/W Ambient Temperature: 45°C

Lumen Maintenance L70B10 >36,000 h

Controller: Remote
Input Voltage: 24Vdc
Net Weight: - kg.



Icon definition

LUXBEAT

LUXBEAT UNDERWATER 500

LINEAR LIGHT

LAST UPDATE: 08-04-2025



Specification

IEC Standard IEC 60598-1 General Requirement

IEC 60598-2-18 Luminaires for Swimming Pools

Protection IP68 Class III

Luminaires Body Housing Co-extruded silicone housing resistant to chlorine water

Tool free installation utilizing interlocking stainless steel springs.

Cable Entry Electrical loop, with M12 IP68 connector

Led High efficiency LED module utilized chips from world renowned manufacturer. Assembled on FPC. Other CCT is available on request.

Driver is not included and has to be ordered separately.


Internal Wire Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.


Pre-Wire Cable Pre-wired cable 2x0.75sqmm, L=4,000mm

Caution Installation, dismantling and repairs must be carried out by qualified electrician.

Maximum continuous installation length for 1 driver is 5m. Custom length is available (prepared by the factory).

Light Distribution





LUXBEAT


LUXBEAT UNDERWATER 500

LINEAR LIGHT


LAST UPDATE: 08-04-2025



Accessories



Ordering Code: AUN-DRG-0011-00 LED constant voltage driver, 24VDC, 150W



Ordering Code: AUN-DRG-0024-00 LED constant voltage driver, 24VDC, 200W




Ordering Code: AUN-DRG-0027-00 LED constant voltage driver, 24VDC, 72W




Ordering Code: AUN-BRK-0008-00 Mounting clip, set of 2pcs, including mounting hardware



Ordering Code:
AUN-CAB-0044-00
Extended pre-wired cable
2x1sqmm, L=6000mm,
with UniBlock
anti-humidity kit,
pre-assembly from factory



Ordering Code: AUN-DRG-0100-00 LED constant voltage driver, 24VDC, 60W, DALI



Ordering Code: AUN-DRG-0101-00 LED constant voltage driver, 24VDC, 12OW, DALI