

LUXBEAT

LUXBEAT XL 1000


INGROUND LIGHT | LINEAR LIGHT



LAST UPDATE: 09-12-2025



LuxBeat, LuxBeat L, LuxBeat XL, LuxBeat Inground, and LuxBeat Underwater are miniature linear accent luminaires for both flexible and fixed applications. With a patented optical system, they deliver uniform light output from every angle, creating precise, high-contrast illumination of architectural features. Their compact size enables accurate highlighting and versatile installation. LuxBeat is top bendable and can be shortened on-site to meet project requirements. Stainless steel clips allow direct mounting to walls or façades without surface cleaning or pretreatment, simplifying installation. LuxBeat L features an aluminum housing for fixed use or clips for flexible mounting, ensuring smooth, shadow-free connections. Its slim design produces sharp, elegant lighting that highlights architectural details. LuxBeat XL offers a robust aluminum housing with an integrated wiring channel and bottom connectors for seamless installation. It is available as fixed or tiltable surface luminaires, recessed wall and ceiling lights, and pendants, with custom lengths on request. LuxBeat Inground provides a recessed solution for concrete floors and outdoor grounds, delivering durability and the same optical performance as the rest of the family. LuxBeat Underwater extends this reliability into pools, fountains, and water features. For RGBW color projects, contact the Unilamp sales team.



Technical Data



| | |
|-----------------------|------------------|
| Ordering Code : | 9076-0-2-399-B4 |
| Lamp : | LED |
| Beam : | 115° |
| CCT : | RGBW |
| CRI : | CRI >40 |
| SDCM : | SDCM = 5 |
| Luminaire Lumen : | 380 lm |
| Luminaire Wattage : | 10 W |
| Efficacy : | 38 lm/W |
| Ambient Temperature : | 50°C |
| Lumen Maintenance | L80B10 >60,000 h |
| Controller : | Remote |
| Input Voltage : | 24Vdc |
| Net Weight : | - kg. |

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

A Product Code
B Reflector
C Electrical Component
D Lamp
E Color



Icon definition



*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

Specification

| | |
|-------------------------|---|
| IEC Standard | IEC 60598-1 General Requirement IEC 60598-2-13 Ground Recessed Luminaires |
| Protection | IP67 Class III |
| IK Rating | Protection against mechanical impact IK10 on body and optical part. |
| Luminaires Body Housing | Extruded aluminum 6063 alloy body with low copper content. Luminaire withstands a maximum static load of 1000 kg. |
| Coating Process | Aluminum anodizing in which aluminum products surface are coated using a wear-resistant oxide layer. |
| Diffuser | Weather resistant extruded PMMA cover. |
| Cable Entry | Electrical loop in and out, with M12 connector |
| Led | High efficiency LED module utilized chips from world renowned manufacturer. Assembled on FPC. |
| Driver | Requires the use of a 4 channel CV RGBW controller |
| Pre-Wire Cable | Pre-wired cable 5x0.5sqmm, L=150mm |
| Caution | Installation, dismantling and repairs must be carried out by qualified electrician. Maximum continuous installation length for 1 driver is 5m. |

Light Distribution



LUXBEAT


LUXBEAT XL 1000

INGROUND LIGHT | LINEAR LIGHT



LAST UPDATE: 09-12-2025

Bug Report

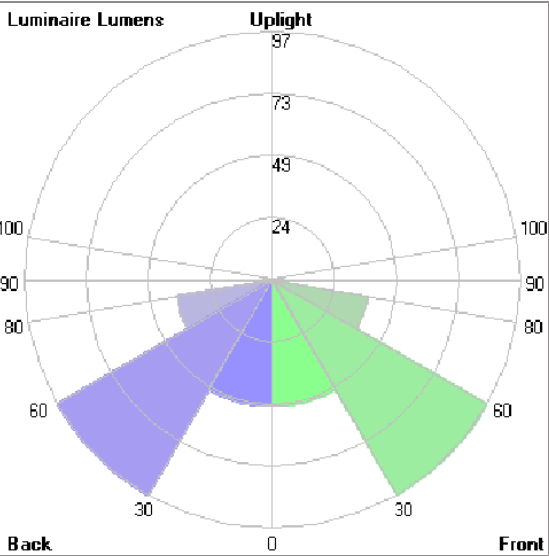

| Lum. Classification System (LCS) | | | | |
|----------------------------------|-----------|---------|-------|-------|
| LCS | Zone | %Lumens | %Lamp | %Lum |
| FL | [0-30] | 49.6 | 13.1 | 13.1 |
| FM | [30-60] | 97.5 | 25.6 | 25.8 |
| FH | [60-80] | 38.1 | 10.0 | 10.1 |
| FVH | [80-90] | 3.9 | 1.0 | 1.0 |
| BL | [0-30] | 49.6 | 13.1 | 13.1 |
| BM | [30-60] | 97.5 | 25.6 | 25.8 |
| BH | [60-80] | 38.1 | 10.0 | 10.1 |
| BVH | [80-90] | 3.9 | 1.0 | 1.0 |
| UL | [90-100] | 0.0 | 0.0 | 0.0 |
| UH | [100-180] | 0.0 | 0.0 | 0.0 |
| Total | | 378.2 | 99.4 | 100.0 |
| BUG Rating | BO-UO-GO | | | |

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

LUXBEAT


LUXBEAT XL 1000

INGROUND LIGHT | LINEAR LIGHT




LAST UPDATE: 09-12-2025


Accessories



Ordering Code:
AUN-DRG-0011-00
LED constant voltage
driver, 24VDC, 150W




Ordering Code:
AUN-DRG-0024-00
LED constant voltage
driver, 24VDC, 200W




Ordering Code:
AUN-DRG-0027-00
LED constant voltage
driver, 24VDC, 72W



Ordering Code:
AUN-DRG-0119-00
LED constant voltage
decoder, 24Vdc, 180W,
with IP67 GFR polymer
enclosure, DMX512/RDM



Ordering Code:
ATR-CON-0007-00
IP67 cable with female
connector, M12, 2000mm
length cable. 5Pin



Ordering Code:
ATR-MIS-0001-B4
Metal end cap



Ordering Code:
ATR-CON-0009-00
IP67 cover for female
connector 5Pin,
pre-assembly from factory

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th