Unilamp





*Pole is not included and has to be ordered separately.

From slow speed secondary roads to multi lane highways NARA is the perfect solution for all road lighting requirements. T2 and T3 CAD optimized optics are available as a standard product option. On request a NEMA or Zhaga connector can be added across the range. A O.8m long pre-wired cable and pressure equalizing element are standard.

The cleverly designed pole adapter allows horizontal or vertical pole entry and includes an easy-to-read graduated scale. The housing is cast from a highly corrosion resistant aluminum alloy. The operating temperature of 50°C allows reliable use in challenging environmental conditions.

















Specification


- Designed, Manufactured and Tested according to IEC 60598.
- LM6 Die Cast Aluminium and Extruded Aluminium housing.
- Stainless steel screws.
- Luminiare top coated with UV stabilized polyester powder and cured.
- Double layer coating.
- Safety glass cover.
- Molded Lens from renowned manufacturer.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.


Available Color


Aluminium Silver


(replace the last 2 digits of ordering code with A4)



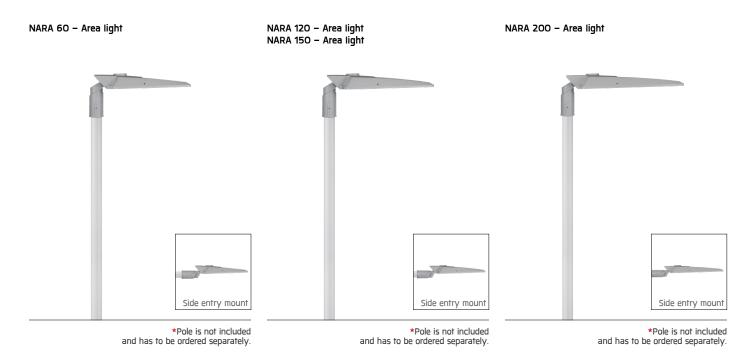








NARA	NEW!							
AREA LIGHT								
NARA 60 - Area light / 7705								
NARA 120 - Area light / 7706								
NARA 150 - Area light / 7706								
NARA 200 - Area light / 7707								
Luminaire Performance								
8640 - 31110 lm								
61 – 203 W								
140 - 154 lm/W								
Beam Options								
12 13								
Color Temperature								
4000K								
Controller								
On-Off								



	Product Code	Product Name	Luminaire Wattage	Beam	ССТ	Luminaire Lumen	Controller
NAKA	OD-7705	NARA 60 – Area light	61 W	T2 T3 T3	4000 K 4000 K 4000 K	9030 lm 8860 lm 8640 lm	On-Off On-Off On-Off
	0D-7706	NARA 120 – Area light	120 W	T2 T3 T3	4000 K 4000 K 4000 K	18120 lm 18580 lm 16830 lm	On-Off On-Off On-Off
İ							
	OD-7706	NARA 150 – Area light	150 W	T2 T3 T3	4000 K 4000 K 4000 K	23230 lm 22900 lm 21180 lm	On-Off On-Off On-Off
	OD-7707	NARA 200 – Area light	203 W	T2 T3 T3	4000 K 4000 K 4000 K	31110 lm 30490 lm 28885 lm	On-Off On-Off On-Off

*Pole is not included and has to be ordered separately.

: Application Reference







Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand Tel : +66[0]2 943 2420–1, +66[0]2 946 4170–1 Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th

