



ARC



Mini ARC

NEW!

ARC

INGROUND LIGHT

Compact And Precise With A Clean Beam
Fully Adjustable From The Outside

NEW!



Mini ARC



ARC - CC [DMX]


RGBW



The **ARC** is an adjustable walkover in-ground uplighter designed to enhance urban architectural structures and landscapes. Its innovative external aiming mechanism allows for precise adjustments without opening the fixture, preserving the IP rating. Adjustments can be made with a standard screwdriver or hex key, facilitating final commissioning without removing the luminaire.

Crafted from enhanced LM6 aluminum with a Nano Ceramic surface conversion and double-coated with primer and durable polyester powder, ARC ensures long-lasting protection. The stainless steel front cover plate further enhances durability. The luminaire delivers exceptional beam quality with high contrast and precise light control. It features a pre-wired supply cable with anti-humidity protection and internal potting to prevent moisture and condensation, making it ideal for in-ground applications.

ARC incorporates a COB single light source for consistent, smooth illumination and a 4-in-1 RGBW chip for flawless color mixing, making it perfect for highlighting architectural features and enhancing visual appeal.



www.unilamp.co.th/en/p/arc

Specification

- Designed, manufactured and tested according to IEC 60598.
- Stainless steel, LM6 die-cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens.
- Adjustable optical unit.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.



Typical Application




ARC



ARC

ARC - CC [DMX]



ARC

Application Type : Inground light
Subgroup : Up light

| | |
|------------------------------|---|
| ARC / 9060 | |
| ARC - CC [DMX] / 9060 | |
| Luminaire Performance | |
| | 610 - 2700 lm |
| | 19 - 27 W |
| | 27 - 103 lm/W |
| Beam Options | |
| | |
| Color Temperature | |
| | 2700K/ 3000K/ 4000K/ RGBW |
| Controller | |
| | On-Off/ 1-10V/ DALI/ Remote |
| Input Options | |
| | 220-240Vac 50/60Hz |
| | 500mA, 4Chx8.9Vdc-11.4Vdc, Uin max 150Vdc |

| | | |
|--------------------|-------------------|------------------|
| Accessories | | |
| | Honey Comb Louver | IP68 Connector |
| | CV Driver | DMX Decoder |
| | Splitter DMX | Cable |
| | XLR 3 pin | IP67 Water Tight |
| | IP68 Water Tight | DMX Controller |



Mini ARC


NEW!



COB



7 degree

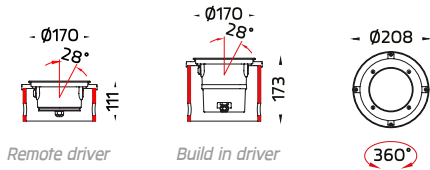

ARC


Application Type : Inground light
 Subgroup : Up light

Mini ARC / 9059

Luminaire Performance

49 - 1630 lm
 4 - 16 W
 11 - 135 lm/W

Beam Options



Color Temperature

2700K / 3000K / 4000K


Controller








On-Off / DALI / Remote

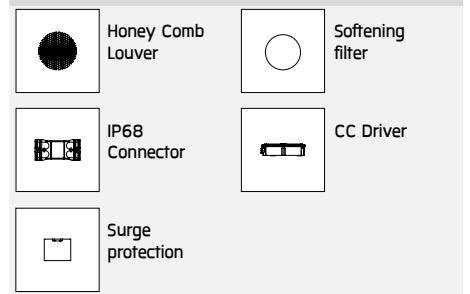Input Options




220-240Vac 50/60Hz
 350mA, 31.5Vdc, Uin max 500Vdc
 700mA, 11.6Vdc, Uin max 150Vdc
 1050mA, 11.9Vdc, Uin max 150Vdc

Accessories



| Product Code | Luminaire Wattage | Beam | CCT | Luminaire Lumen | Efficacy | Controller | | | | Ordering Code | |
|--|--|---|----------|-----------------|----------|---|--|---|-----------------|-----------------|-----------------|
| | | | | | |  |  |  | REMOTE | | |
| ARC  | OD-9060 | 33° | 2700 K | 1830 lm | 96 lm/W | • | | | | 9060-C-3-506-91 | |
| | | | 3000 K | 1920 lm | 101 lm/W | • | | | | 9060-C-3-887-91 | |
| | | | 4000 K | 1960 lm | 103 lm/W | • | | | | 9060-C-3-891-91 | |
| | | | 2700 K | 1830 lm | 96 lm/W | | • | | | 9060-C-4-506-91 | |
| | | | 3000 K | 1920 lm | 101 lm/W | | • | | | 9060-C-4-887-91 | |
| | | | 4000 K | 1960 lm | 103 lm/W | | • | | | 9060-C-4-891-91 | |
| | | | 2700 K | 1830 lm | 96 lm/W | | | • | | 9060-C-5-506-91 | |
| | | | 3000 K | 1920 lm | 101 lm/W | | | • | | 9060-C-5-887-91 | |
| | | | 4000 K | 1960 lm | 103 lm/W | | | • | | 9060-C-5-891-91 | |
| | | | 2700 K | 1710 lm | 90 lm/W | | | | • | 9060-D-3-506-91 | |
| | | | 3000 K | 1790 lm | 94 lm/W | | | | • | 9060-D-3-887-91 | |
| | | | 4000 K | 1840 lm | 96 lm/W | | | | • | 9060-D-3-891-91 | |
| | | 2700 K | 1710 lm | 90 lm/W | | | • | | 9060-D-4-506-91 | | |
| | | 3000 K | 1790 lm | 94 lm/W | | | • | | 9060-D-4-887-91 | | |
| | | 4000 K | 1840 lm | 96 lm/W | | | • | | 9060-D-4-891-91 | | |
| | | 2700 K | 1710 lm | 90 lm/W | | | | • | 9060-D-5-506-91 | | |
| | | 3000 K | 1790 lm | 94 lm/W | | | | • | 9060-D-5-887-91 | | |
| | | 4000 K | 1840 lm | 96 lm/W | | | | • | 9060-D-5-891-91 | | |
| | | 2700 K | 1830 lm | 91 lm/W | | | | • | 9060-A-3-767-91 | | |
| | | 3000 K | 1890 lm | 94 lm/W | | | | • | 9060-A-3-768-91 | | |
| | | 4000 K | 1990 lm | 99 lm/W | | | | • | 9060-A-3-769-91 | | |
| | | 2700 K | 1830 lm | 91 lm/W | | | • | | 9060-A-4-767-91 | | |
| | | 3000 K | 1890 lm | 94 lm/W | | | • | | 9060-A-4-768-91 | | |
| | | 4000 K | 1990 lm | 99 lm/W | | | • | | 9060-A-4-769-91 | | |
| | 2700 K | 1830 lm | 91 lm/W | | | | • | 9060-A-5-767-91 | | | |
| | 3000 K | 1890 lm | 94 lm/W | | | | • | 9060-A-5-768-91 | | | |
| | 4000 K | 1990 lm | 99 lm/W | | | | • | 9060-A-5-769-91 | | | |
| | 2700 K | 2510 lm | 96 lm/W | | | • | | 9060-C-3-505-91 | | | |
| | 3000 K | 2630 lm | 101 lm/W | | | • | | 9060-C-3-902-91 | | | |
| | 4000 K | 2700 lm | 103 lm/W | | | • | | 9060-C-3-905-91 | | | |
| | 2700 K | 2510 lm | 96 lm/W | | | | • | 9060-C-4-505-91 | | | |
| | 3000 K | 2630 lm | 101 lm/W | | | | • | 9060-C-4-902-91 | | | |
| | 4000 K | 2700 lm | 103 lm/W | | | | • | 9060-C-4-905-91 | | | |
| | 2700 K | 2510 lm | 96 lm/W | | | | • | 9060-C-5-505-91 | | | |
| | 3000 K | 2630 lm | 101 lm/W | | | | • | 9060-C-5-902-91 | | | |
| | 4000 K | 2700 lm | 103 lm/W | | | | • | 9060-C-5-905-91 | | | |
| | 2700 K | 2350 lm | 90 lm/W | | | • | | 9060-D-3-505-91 | | | |
| | 3000 K | 2460 lm | 94 lm/W | | | • | | 9060-D-3-902-91 | | | |
| | 4000 K | 2520 lm | 96 lm/W | | | • | | 9060-D-3-905-91 | | | |
| | 2700 K | 2350 lm | 90 lm/W | | | | • | 9060-D-4-505-91 | | | |
| | 3000 K | 2460 lm | 94 lm/W | | | | • | 9060-D-4-902-91 | | | |
| | 4000 K | 2520 lm | 96 lm/W | | | | • | 9060-D-4-905-91 | | | |
| | 2700 K | 2350 lm | 90 lm/W | | | | • | 9060-D-5-505-91 | | | |
| | 3000 K | 2460 lm | 94 lm/W | | | | • | 9060-D-5-902-91 | | | |
| | 4000 K | 2520 lm | 96 lm/W | | | | • | 9060-D-5-905-91 | | | |
| | 2700 K | 2460 lm | 91 lm/W | | | • | | 9060-A-3-710-91 | | | |
| | 3000 K | 2540 lm | 94 lm/W | | | • | | 9060-A-3-719-91 | | | |
| | 4000 K | 2680 lm | 99 lm/W | | | • | | 9060-A-3-720-91 | | | |
| 2700 K | 2460 lm | 91 lm/W | | | | • | 9060-A-4-710-91 | | | | |
| 3000 K | 2540 lm | 94 lm/W | | | | • | 9060-A-4-719-91 | | | | |
| 4000 K | 2680 lm | 99 lm/W | | | | • | 9060-A-4-720-91 | | | | |
| 2700 K | 2460 lm | 91 lm/W | | | | • | 9060-A-5-710-91 | | | | |
| 3000 K | 2540 lm | 94 lm/W | | | | • | 9060-A-5-719-91 | | | | |
| 4000 K | 2680 lm | 99 lm/W | | | | • | 9060-A-5-720-91 | | | | |
| ARC - CC [DMX]  | OD-9060 | 15° | RGBW | 680 lm | 30 lm/W | | | | • | 9060-A-D-440-91 | |
| | | 26° | RGBW | 610 lm | 27 lm/W | | | | • | 9060-B-D-440-91 | |
| | | 35° | RGBW | 610 lm | 27 lm/W | | | | • | 9060-C-D-440-91 | |
| | Mini ARC  | OD-9059 | 7° | 3000 K | 49 lm | 11 lm/W | • | | | | 9059-4-3-227-91 |
| | | | | 3000 K | 66 lm | 11 lm/W | • | | | | 9059-4-3-293-91 |
| | | | | 3000 K | 49 lm | 12 lm/W | | | • | | 9059-4-5-227-91 |
| | | | | 3000 K | 66 lm | 11 lm/W | | | • | | 9059-4-5-293-91 |
| | | | | 3000 K | 66 lm | 15 lm/W | | | | • | 9059-4-I-293-91 |
| | |  | 9 W | 14° | 2700 K | 930 lm | 103 lm/W | • | | | |
| 3000 K | | | | | 930 lm | 103 lm/W | • | | | | 9059-A-3-532-91 |
| 4000 K | | | | | 1000 lm | 111 lm/W | • | | | | 9059-A-3-533-91 |
| 2700 K | | | | | 930 lm | 103 lm/W | | | • | | 9059-A-5-531-91 |
| 3000 K | | | | | 930 lm | 103 lm/W | | | • | | 9059-A-5-532-91 |
| 4000 K | | | | | 1000 lm | 111 lm/W | | | • | | 9059-A-5-533-91 |
| 2700 K | | | | 880 lm | 97 lm/W | | | • | | 9059-C-3-531-91 | |
| 3000 K | | | | 880 lm | 97 lm/W | | | • | | 9059-C-3-532-91 | |
| 4000 K | | | | 940 lm | 104 lm/W | | | • | | 9059-C-3-533-91 | |
| 2700 K | | | | 880 lm | 97 lm/W | | | | • | 9059-C-5-531-91 | |
| 3000 K | 880 lm | 97 lm/W | | | | • | 9059-C-5-532-91 | | | | |
| 4000 K | 940 lm | 104 lm/W | | | | • | 9059-C-5-533-91 | | | | |
| 2700 K | 780 lm | 86 lm/W | | | • | | 9059-D-3-531-91 | | | | |
| 3000 K | 780 lm | 86 lm/W | | | • | | 9059-D-3-532-91 | | | | |
| 4000 K | 830 lm | 92 lm/W | | | • | | 9059-D-3-533-91 | | | | |
| 2700 K | 780 lm | 86 lm/W | | | | • | 9059-D-5-531-91 | | | | |
| 3000 K | 780 lm | 86 lm/W | | | | • | 9059-D-5-532-91 | | | | |
| 4000 K | 830 lm | 92 lm/W | | | | • | 9059-D-5-533-91 | | | | |
| 2700 K | 870 lm | 96 lm/W | | | • | | 9059-K-3-531-91 | | | | |
| 3000 K | 870 lm | 96 lm/W | | | • | | 9059-K-3-532-91 | | | | |
| 4000 K | 930 lm | 103 lm/W | | | • | | 9059-K-3-533-91 | | | | |
| 2700 K | 870 lm | 96 lm/W | | | | • | 9059-K-5-531-91 | | | | |
| 3000 K | 870 lm | 96 lm/W | | | | • | 9059-K-5-532-91 | | | | |
| 4000 K | 930 lm | 103 lm/W | | | | • | 9059-K-5-533-91 | | | | |

*Please contact sales team for special request.

| Product Code | Luminaire Wattage | Beam | CCT | Luminaire Lumen | Efficacy | Controller | | | Ordering Code | |
|--------------|-------------------|---|--------|-----------------|----------|---|---|--------|-----------------|-----------------|
| | | | | | |  |  | REMOTE | | |
| Mini ARC | 00-9059 |  | 14° | 2700 K | 1340 lm | 95 lm/W | | | . | 9059-A-I-528-91 |
| | 3000 K | | | 1340 lm | 95 lm/W | | | . | 9059-A-I-529-91 | |
| | 4000 K | | | 1430 lm | 102 lm/W | | | . | 9059-A-I-530-91 | |
| | 14 W | | 25° | 2700 K | 1260 lm | 90 lm/W | | | . | 9059-C-I-528-91 |
| | | | | 3000 K | 1260 lm | 90 lm/W | | | . | 9059-C-I-529-91 |
| | | | | 4000 K | 1350 lm | 96 lm/W | | | . | 9059-C-I-530-91 |
| | 46° | | 2700 K | 1120 lm | 80 lm/W | | | . | 9059-D-I-528-91 | |
| | | | 3000 K | 1120 lm | 80 lm/W | | | . | 9059-D-I-529-91 | |
| | | | 4000 K | 1190 lm | 85 lm/W | | | . | 9059-D-I-530-91 | |
| | Asymmetric | | 2700 K | 1250 lm | 89 lm/W | | | . | 9059-K-I-528-91 | |
| | | | 3000 K | 1250 lm | 89 lm/W | | | . | 9059-K-I-529-91 | |
| | | | 4000 K | 1330 lm | 95 lm/W | | | . | 9059-K-I-530-91 | |
| | 16 W | 14° | 2700 K | 1340 lm | 83 lm/W | . | | . | 9059-A-3-528-91 | |
| | | | 3000 K | 1340 lm | 83 lm/W | . | | . | 9059-A-3-529-91 | |
| | | | 4000 K | 1430 lm | 89 lm/W | . | | . | 9059-A-3-530-91 | |
| | | 25° | 2700 K | 1260 lm | 78 lm/W | . | . | . | 9059-A-5-528-91 | |
| | | | 3000 K | 1260 lm | 78 lm/W | . | . | . | 9059-A-5-529-91 | |
| | | | 4000 K | 1350 lm | 84 lm/W | . | . | . | 9059-A-5-530-91 | |
| | | 46° | 2700 K | 1120 lm | 70 lm/W | . | . | . | 9059-C-3-528-91 | |
| | | | 3000 K | 1120 lm | 70 lm/W | . | . | . | 9059-C-3-529-91 | |
| | | | 4000 K | 1190 lm | 78 lm/W | . | . | . | 9059-C-3-530-91 | |
| | | Asymmetric | 2700 K | 1260 lm | 78 lm/W | . | . | . | 9059-C-5-528-91 | |
| | | | 3000 K | 1260 lm | 78 lm/W | . | . | . | 9059-C-5-529-91 | |
| | | | 4000 K | 1350 lm | 84 lm/W | . | . | . | 9059-C-5-530-91 | |
| | 10 W | 20° | 2700 K | 1080 lm | 108 lm/W | . | . | . | 9059-D-3-528-91 | |
| | | | 3000 K | 1080 lm | 108 lm/W | . | . | . | 9059-D-3-529-91 | |
| | | | 4000 K | 1190 lm | 119 lm/W | . | . | . | 9059-D-3-530-91 | |
| | | 27° | 2700 K | 1040 lm | 70 lm/W | . | . | . | 9059-D-5-528-91 | |
| | | | 3000 K | 1040 lm | 70 lm/W | . | . | . | 9059-D-5-529-91 | |
| | | | 4000 K | 1190 lm | 74 lm/W | . | . | . | 9059-D-5-530-91 | |
| | | 36° | 2700 K | 1040 lm | 104 lm/W | . | . | . | 9059-D-5-528-91 | |
| | | | 3000 K | 1030 lm | 103 lm/W | . | . | . | 9059-D-5-529-91 | |
| | | | 4000 K | 1150 lm | 115 lm/W | . | . | . | 9059-D-5-530-91 | |
| | | 56° | 2700 K | 1010 lm | 101 lm/W | . | . | . | 9059-K-3-528-91 | |
| | | | 3000 K | 1060 lm | 106 lm/W | . | . | . | 9059-K-3-529-91 | |
| | | | 4000 K | 1110 lm | 111 lm/W | . | . | . | 9059-K-3-530-91 | |
| | 12 W | 20° | 2700 K | 1470 lm | 113 lm/W | . | . | . | 9059-K-5-528-91 | |
| | | | 3000 K | 1550 lm | 119 lm/W | . | . | . | 9059-K-5-529-91 | |
| | | | 4000 K | 1630 lm | 125 lm/W | . | . | . | 9059-K-5-530-91 | |
| | | 27° | 2700 K | 1420 lm | 109 lm/W | . | . | . | 9059-K-5-528-91 | |
| | | | 3000 K | 1500 lm | 115 lm/W | . | . | . | 9059-K-5-529-91 | |
| | | | 4000 K | 1570 lm | 120 lm/W | . | . | . | 9059-K-5-530-91 | |
| | | 36° | 2700 K | 1350 lm | 103 lm/W | . | . | . | 9059-K-5-528-91 | |
| | | | 3000 K | 1420 lm | 109 lm/W | . | . | . | 9059-K-5-529-91 | |
| | | | 4000 K | 1490 lm | 114 lm/W | . | . | . | 9059-K-5-530-91 | |
| | | 56° | 2700 K | 1380 lm | 106 lm/W | . | . | . | 9059-K-5-528-91 | |
| | | | 3000 K | 1450 lm | 111 lm/W | . | . | . | 9059-K-5-529-91 | |
| | | | 4000 K | 1520 lm | 116 lm/W | . | . | . | 9059-K-5-530-91 | |
| | 13 W | 20° | 2700 K | 1470 lm | 113 lm/W | . | . | . | 9059-6-3-504-91 | |
| | | | 3000 K | 1550 lm | 119 lm/W | . | . | . | 9059-6-3-886-91 | |
| | | | 4000 K | 1630 lm | 125 lm/W | . | . | . | 9059-6-3-890-91 | |
| | | 27° | 2700 K | 1420 lm | 109 lm/W | . | . | . | 9059-6-5-504-91 | |
| | | | 3000 K | 1500 lm | 115 lm/W | . | . | . | 9059-6-5-886-91 | |
| | | | 4000 K | 1570 lm | 120 lm/W | . | . | . | 9059-6-5-890-91 | |
| | | 36° | 2700 K | 1350 lm | 103 lm/W | . | . | . | 9059-6-5-504-91 | |
| | | | 3000 K | 1420 lm | 109 lm/W | . | . | . | 9059-6-5-886-91 | |
| | | | 4000 K | 1490 lm | 114 lm/W | . | . | . | 9059-6-5-890-91 | |
| | | 56° | 2700 K | 1380 lm | 106 lm/W | . | . | . | 9059-6-5-504-91 | |
| | | | 3000 K | 1450 lm | 111 lm/W | . | . | . | 9059-6-5-886-91 | |
| | | | 4000 K | 1520 lm | 116 lm/W | . | . | . | 9059-6-5-890-91 | |
| | COB | 20° | 2700 K | 1080 lm | 108 lm/W | . | . | . | 9059-6-1-503-91 | |
| | | | 3000 K | 1130 lm | 113 lm/W | . | . | . | 9059-6-1-901-91 | |
| | | | 4000 K | 1190 lm | 119 lm/W | . | . | . | 9059-6-1-904-91 | |
| | | 27° | 2700 K | 1040 lm | 104 lm/W | . | . | . | 9059-B-1-503-91 | |
| | | | 3000 K | 1090 lm | 109 lm/W | . | . | . | 9059-B-1-901-91 | |
| | | | 4000 K | 1150 lm | 115 lm/W | . | . | . | 9059-B-1-904-91 | |
| | | 36° | 2700 K | 1040 lm | 104 lm/W | . | . | . | 9059-C-1-503-91 | |
| | | | 3000 K | 1030 lm | 103 lm/W | . | . | . | 9059-C-1-901-91 | |
| | | | 4000 K | 1150 lm | 115 lm/W | . | . | . | 9059-C-1-904-91 | |
| | | 56° | 2700 K | 1010 lm | 101 lm/W | . | . | . | 9059-D-1-503-91 | |
| | | | 3000 K | 1060 lm | 106 lm/W | . | . | . | 9059-D-1-901-91 | |
| | | | 4000 K | 1110 lm | 111 lm/W | . | . | . | 9059-D-1-904-91 | |
| | COB | 20° | 2700 K | 1470 lm | 113 lm/W | . | . | . | 9059-6-3-503-91 | |
| | | | 3000 K | 1550 lm | 119 lm/W | . | . | . | 9059-6-3-901-91 | |
| | | | 4000 K | 1630 lm | 125 lm/W | . | . | . | 9059-6-3-904-91 | |
| | | 27° | 2700 K | 1420 lm | 109 lm/W | . | . | . | 9059-6-5-503-91 | |
| | | | 3000 K | 1500 lm | 115 lm/W | . | . | . | 9059-6-5-901-91 | |
| | | | 4000 K | 1570 lm | 120 lm/W | . | . | . | 9059-6-5-904-91 | |
| | | 36° | 2700 K | 1350 lm | 103 lm/W | . | . | . | 9059-B-3-503-91 | |
| | | | 3000 K | 1420 lm | 109 lm/W | . | . | . | 9059-B-3-901-91 | |
| | | | 4000 K | 1490 lm | 114 lm/W | . | . | . | 9059-B-3-904-91 | |
| | | 56° | 2700 K | 1380 lm | 106 lm/W | . | . | . | 9059-B-5-503-91 | |
| | | | 3000 K | 1450 lm | 111 lm/W | . | . | . | 9059-B-5-901-91 | |
| | | | 4000 K | 1520 lm | 116 lm/W | . | . | . | 9059-B-5-904-91 | |
| | COB | 20° | 2700 K | 1470 lm | 113 lm/W | . | . | . | 9059-C-3-503-91 | |
| | | | 3000 K | 1550 lm | 119 lm/W | . | . | . | 9059-C-3-901-91 | |
| | | | 4000 K | 1630 lm | 125 lm/W | . | . | . | 9059-C-3-904-91 | |
| | | 27° | 2700 K | 1420 lm | 109 lm/W | . | . | . | 9059-C-5-503-91 | |
| | | | 3000 K | 1500 lm | 115 lm/W | . | . | . | 9059-C-5-901-91 | |
| | | | 4000 K | 1570 lm | 120 lm/W | . | . | . | 9059-C-5-904-91 | |
| | | 36° | 2700 K | 1350 lm | 103 lm/W | . | . | . | 9059-D-3-503-91 | |
| | | | 3000 K | 1420 lm | 109 lm/W | . | . | . | 9059-D-3-901-91 | |
| | | | 4000 K | 1490 lm | 114 lm/W | . | . | . | 9059-D-3-904-91 | |
| | | 56° | 2700 K | 1380 lm | 106 lm/W | . | . | . | 9059-C-5-503-91 | |
| | | | 3000 K | 1450 lm | 111 lm/W | . | . | . | 9059-C-5-901-91 | |
| | | | 4000 K | 1520 lm | 116 lm/W | . | . | . | 9059-C-5-904-91 | |

*Please contact sales team for special request.



CONTACT US

Unilamp Co.,Ltd.

online@unilamp.co.th
www.unilamp.co.th

Unilamp Thailand

461 Ramintra Road, Kannayao, Bangkok
10230 Thailand
Tel : +66[0]2 943 2420-1
Tel : +66[0]2 946 4170-1
Fax : +66[0]2 943 2419

Warehouse :

2519 Ladprao 79, Ladprao Road,
Wangthonglang, Bangkok 10310 Thailand
Tel : +66[0]84 427 7235

Factory 1 :

25 Moo 11 Tambol Bansang,
Amper Bansang, Prachinburi 25150 Thailand
Tel : +66[0]89 900 5904

Factory 2 :

29 Moo 3 Tambol Bansang,
Amper Bansang, Prachinburi 25150 Thailand
Tel : +66[0]85 133 5904

Unilamp Middle East

Regional Office – UAE & Oman
Sharjah Airport International
Free Zone (SAIF), UAE
Contact Person: Mr. Afham
E-mail : afham@unilamp.co.th
Tel : +971 54 796 1356

Regional Office – MENA
Amman, Jordan
Contact Person: Mr. Alaa
E-mail : alaa@unilamp.co.th
Tel : +962 79 998 8355

Unilamp India

A-31/S-1 (Block A), Dilshad Garden,
Delhi, India 110095
Contact Person : Mr. Deepanshu
E-mail : deepanshu_b@unilamp.co.th
Tel : +91 11 4506 2790,
Tel : +91 98 7113 5550

Unilamp ASEAN & Hong Kong

Singapore
Contact Person: Mr. Mick
E-mail : mick@unilamp.co.th
Tel : +65 8416 6474

Unilamp Norden AS

Industriveien 11 1481 Hagan, Norway
Tel : +47 67 49 47 70
Tel : +47 22 32 50 22
Website : <https://www.unilamp.no>



Unilamp Linkbio

DUE TO THE CONSTANCY OF PRODUCT DEVELOPMENT,
WE RESERVE THE RIGHT TO ALTER ALL SPECIFICATION
WITHOUT PRIOR NOTICE.

PLEASE CHECK PRODUCT AVAILABILITY AND UPDATES
ON OUR WEBSITE OR SALES REPRESENTATIVE.

Last update on 19/12/2025