
## ATHLON OPTIC


FLOOD LIGHT

LAST UPDATE: 31-10-2025




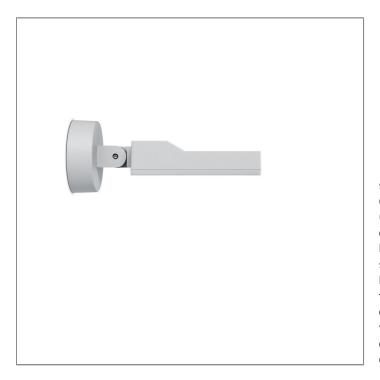

ATHLON family is functional mini spotlight/ floodlight and area light. The slim and clean design of Athlon allows a hidden installation. Athlon is designed for a streamlined time effective installation. Alanod Miro reflectors used in this luminaire are designed by Photopia high—end lighting engineering software. ATHLON Optic with tight beam control utilizes selected lenses from world—renowned manufacturers. The family is available with symmetric, asymmetric, bisymmetric, elliptical, forward throw and side throw light distributions. The broad range of accessories such as a ground spike, tree strap, outrigger arm and pole clamp makes it a dynamic floodlight choice. The graduated scale provides accuracy of the light distribution on the illuminated surface. ATHLON is suitable to light up small to medium sized objects or areas such as signage boards, ceiling, building facades, parks etc.



### **Technical Data**

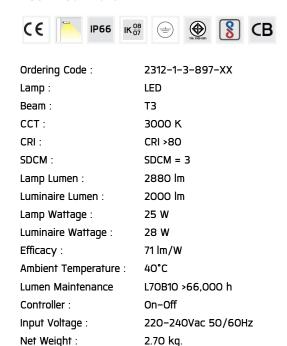



Icon definition

## ATHLON OPTIC

FLOOD LIGHT

**⊕** Unilamp

LAST UPDATE: 31-10-2025

#### Specification

IEC Standard IEC 60598-1 General Requirement

IEC 60598-2-1 Fixed Luminaires

Protection IP66 Class I

IK Rating Protection against mechanical impact IKO8 on body and IKO7 optical part.

Luminaires Body Housing High-pressure die cast aluminum alloy body and components.

Coating Process Nano Ceramic surface conversion, resistant to corrosive environment. Luminiare primarily coated with epoxy resin and top coated

with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.

Diffuser Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.

Adjustable Optic Adjustable aiming unit through graduated scale.

Gasket Post-cured treated silicone qasket. Temperature and weather resistant. Working temperature -40°C to +200°C.

Molded PC lens from renowned manufacturers in various light distribution patterns.

External Screws External screws are in stainless steel with protection grease.

Cable Entry Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 6-13mm. diameter.

Led High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat

conductive material.

Driver High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard.

Internal Wire Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.

Terminal Block Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.

Class1 luminaire provided with the earth connection.


Caution Installation work has to be carried on according to the enclosed installation manual.


Color

Lens



### **Light Distribution**






# **ATHLON OPTIC**

FLOOD LIGHT

**&** Unilamp

LAST UPDATE: 31-10-2025

## **Bug Report**

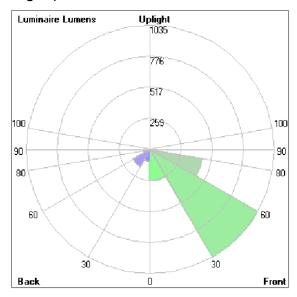

Lum. Classification System (LCS)				
LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	262.1	9.1	12.7
FM	[30-60]	1034.9	35.9	50.0
FH	[60-80]	441.5	15.3	21.3
FVH	[80-90]	12.9	0.4	0.6
BL	[0-30]	98.5	3.4	4.8
ВМ	[30-60]	163.5	5.7	7.9
ВН	[60-80]	52.6	1.8	2.5
BVH	[80-90]	3.6	0.1	0.2
UL	[90-100]	0.7	0.0	0.0
UH	[100-180]	0.6	0.0	0.0
Total		2070.9	71.7	100.0
BUG Rat	ing	BO-U1-G1	I	


## ATHLON OPTIC

FLOOD LIGHT

LAST UPDATE: 31-10-2025



### Accessories



Ordering Code: AUN-SOF-0018-00 Softening filter, LED, pre-assembly from factory



Ordering Code:
AUN-CAB-0002-00
Cable H07RN-F 3x1sqmm,
L= 2000, with UniBlock
anti-humidity kit,
pre-assembly from factory



Ordering Code:
AUN-CAB-0004-00
Cable H07RN-F 3x1sqmm,
L= 500, with UniBlock
anti-humidity kit,
pre-assembly from factory



Ordering Code: AUN-ESP-0001-00 Earth spike, GFR polymer



Ordering Code: AUN-TRS-0001-00 Tree strap, small mounting base



Ordering Code: AUN-GHS-0035-XX Glare shield cap, pre-assembly from factory

online@unilamp.co.th

www.unilamp.co.th