

PLUTO

PLUTO RAMP


WALL RECESSED LIGHT



LAST UPDATE: 07-04-2025



Wall recessed fixtures PLUTO is available with LED light source in 2700K, 3000K or 4000K as well as with HID and compact fluorescent lamps. PLUTO-RAMP with its glare free downward light distribution is a perfect fitting for pathway or stair case illumination. PLUTO-Flat is assembled with a unique white ceramic-coated tempered glass and it illuminates not only the ground surface but also its surroundings. The slim-recess housing enables it to be installed in thin wall applications.



Technical Data



| | |
|-----------------------|--------------------|
| Ordering Code : | 6015-0-3-867-XX |
| Lamp : | LED |
| CCT : | 3000 K |
| CRI : | CRI >80 |
| SDCM : | SDCM = 3 |
| Lamp Lumen : | 1920 lm |
| Luminaire Lumen : | 870 lm |
| Lamp Wattage : | 17 W |
| Luminaire Wattage : | 18 W |
| Efficacy : | 48 lm/W |
| Ambient Temperature : | 45°C |
| Lumen Maintenance | L70B10 >66,000 h |
| Controller : | On-Off |
| Input Voltage : | 220-240Vac 50/60Hz |
| Net Weight : | 3.20 kg. |

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

A Product Code
B Reflector
C Electrical Component
D Lamp
E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

PLUTO RAMP



WALL RECESSED LIGHT

LAST UPDATE: 07-04-2025

Specification

| | |
|-------------------------|--|
| IEC Standard | IEC 60598-1 General Requirement IEC 60598-2-2 Recessed Luminaires |
| Protection | IP65 Class I |
| IK Rating | Protection against mechanical impact IK09 on body and IK07 optical part. |
| Luminaires Body Housing | High-pressure die cast aluminum alloy body and components. Wall recessed housing made of GFR polymer. |
| Coating Process | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C. |
| Diffuser | Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C. |
| Gasket | Weather resistant silicone gasket. Working temperature -40°C to +200°C. |
| External Screws | External screws are in stainless steel with protection grease. |
| Cable Entry | Cable entry protected by weather proof grommet. To be used with H05RN-F/ H07RN-F cable with 5-10mm. diameter. |
| Led | High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material. |
| Driver | High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard. |
| Internal Wire | Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C. |
| Terminal Block | Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved. Class1 luminaire provided with the earth connection. |
| Caution | Installation work has to be carried on according to the enclosed installation manual. |
| Color | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 10px; background-color: black; margin-right: 5px;"></div> Black 01 <div style="width: 20px; height: 10px; background-color: #333; margin-right: 5px;"></div> Graphite 02 <div style="width: 20px; height: 10px; background-color: #666; margin-right: 5px;"></div> Dark Grey 03 <div style="width: 20px; height: 10px; background-color: #ccc; margin-right: 5px;"></div> Aluminum Silver 04 <div style="width: 20px; height: 10px; background-color: white; margin-right: 5px;"></div> White 06 </div> |

Light Distribution



PLUTO


PLUTO RAMP

WALL RECESSED LIGHT



LAST UPDATE: 07-04-2025

Bug Report

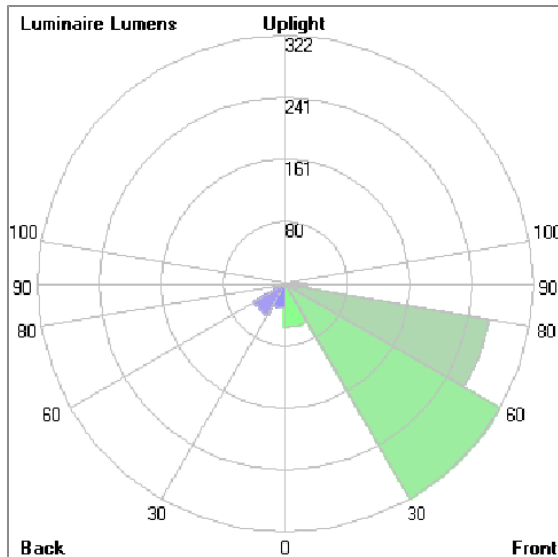

Lum. Classification System (LCS)

| LCS | Zone | %Lumens | %Lamp | %Lum |
|------------|-----------|----------|-------|-------|
| FL | [0-30] | 56.2 | 2.9 | 7.3 |
| FM | [30-60] | 322.0 | 16.8 | 41.9 |
| FH | [60-80] | 267.4 | 13.9 | 34.8 |
| FVH | [80-90] | 28.5 | 1.5 | 3.7 |
| BL | [0-30] | 31.9 | 1.7 | 4.1 |
| BM | [30-60] | 46.6 | 2.4 | 6.1 |
| BH | [60-80] | 14.2 | 0.7 | 1.9 |
| BVH | [80-90] | 1.3 | 0.1 | 0.2 |
| UL | [90-100] | < 0.05 | 0.0 | 0.0 |
| UH | [100-180] | < 0.05 | 0.0 | 0.0 |
| Total | | 768.1 | 40.0 | 100.0 |
| BUG Rating | | B0-U1-G1 | | |

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th