

DOT


DOT OPAL ROUND CV WALL RECESSED LIGHT



LAST UPDATE: 19-12-2025



DOT family is a range of small recessed wall luminaires with LED light sources. Fitted with world renowned LED manufacturer DOT is highly efficient with low energy consumption. The glare-free cover enables them to be installed where comfortable illumination is required. DOT is available in four different design with interchangeable front covers in both square and round shapes. A very small and shallow housing allows the installation of the fixtures in wall or step that have limited recessing depth. DOT provides directional light for stairways and pathways where comfortable low level of light is preferred.



Technical Data



Ordering Code :	6025-O-2-291-XX
Lamp :	Led Retrofit QT9
Socket	G4
CCT :	2700-6500 K
Lamp Wattage :	2-3 W
Ambient Temperature :	25°C
Input Voltage :	12Vac 50/60Hz
Net Weight :	0.30 kg.

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition



*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-2 Recessed Luminaires
Protection	IP65 Class III
IK Rating	Protection against mechanical impact IK07 on body and optical part.
Luminaires Body Housing	High-pressure die cast aluminum alloy body and components.
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.
Diffuser	Self-extinguishing high impact resistant opal polycarbonate diffuser with UV stabilized additive.
Gasket	Weather resistant silicone gasket. Working temperature -40°C to +200°C.
External Screws	External screws are in stainless steel with protection grease.
Cable Entry	Cable entry protected by weather proof grommet. To be used with H05RN-F/ H07RN-F cable with 5-10mm. diameter.
Lamp Holder	G4 lampholder in PPS body. VDE/ ENEC approved.
Ballast	Control gear is not included and has to be ordered separately.
Terminal Block	Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved.
Caution	Installation work has to be carried on according to the enclosed installation manual.
Color	<div> <div></div> Black 01 <div></div> Graphite 02 <div></div> Dark Grey 03 <div></div> Aluminum Silver 04 <div></div> White 06 </div>

Light Distribution




DOT

DOT OPAL ROUND CV WALL RECESSED LIGHT



LAST UPDATE: 19-12-2025

Bug Report

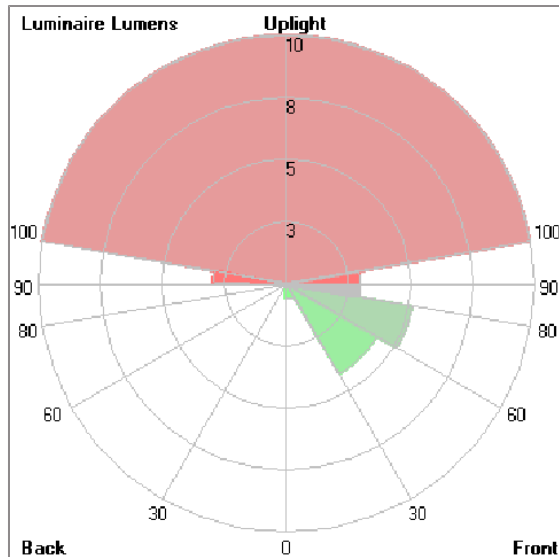

Lum. Classification System (LCS)

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	0.6	0.5	2.4
FM	[30-60]	4.4	3.2	16.3
FH	[60-80]	5.4	3.9	20.0
FVH	[80-90]	3.1	2.2	11.4
BL	[0-30]	< 0.05	0.0	0.0
BM	[30-60]	< 0.05	0.0	0.0
BH	[60-80]	< 0.05	0.0	0.0
BVH	[80-90]	< 0.05	0.0	0.0
UL	[90-100]	3.1	2.2	11.5
UH	[100-180]	10.5	7.5	38.7
Total		27.1	19.5	100.0
BUG Rating	B0-U2-G0			

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th

DOT

DOT OPAL ROUND CV WALL RECESSED LIGHT



LAST UPDATE: 19-12-2025

Accessories



Ordering Code:
AUN-DRG-0115-01
Electronic Transformer,
12V, 20-60W, with IP67
GFR polymer enclosure

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th