

XEON

XEON


WALL SURFACE MOUNT



LAST UPDATE: 17-06-2024



XEON is a rectangular shape wall or ceiling fixture. This luminaire family is made of corrosion resistant LM6 aluminium housing and vandal resistant polycarbonate diffuser. XEON LED utilizes high quality chips with built-in microwave motion sensor and hi-low light function. The diffused light distribution provides general lighting for both private and public areas. XEON is available in three different front cover styles with a choice of five colors. The high protection rating of IP65 and IK09 allows XEON to be installed in the challenging outdoor environments.



Technical Data



Ordering Code :	7028-0-3-453-XX
Lamp :	TC-DEL
Socket :	G24q-3
CCT :	2700-4000 K
Lamp Lumen :	1800 lm
Luminaire Lumen :	1800 lm
Lamp Wattage :	26 W
Luminaire Wattage :	26 W
Ambient Temperature :	25°C
Controller :	On-Off
Energy Class :	A++
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	2.10 kg.

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th



Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires
Protection	IP65 Class I
Luminaires Body Housing	High-pressure die cast aluminum alloy body and components.
Coating Process	Nano ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.
Diffuser	Self-extinguishing high impact resistant opal polycarbonate diffuser with UV stabilized additive.
Gasket	Weather resistant silicone gasket. Working temperature -40°C to +200°C.
External Screws	External screws are in stainless steel with protection grease.
Cable Entry	Cable entry protected by weather proof grommet. To be used with HO5RN-F/ HO7RN-F cable with 5-10mm. diameter.
Lamp Holder	G24q/ GX24q lampholder in PBT body. IMQ/ ENEC approved.
Ballast	Electronic ballast for fluorescent lamp. ENEC approved.
Internal Wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.
Terminal Block	Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved. Class1 luminaire provided with the earth connection.

Caution Installation work has to be carried on according to the enclosed installation manual.

Color	 Black O1  Graphite O2  Dark Grey O3  Aluminum Silver O4  White O6  Wooden Brown O7
-------	--

Light Distribution



XEON


XEON

WALL SURFACE MOUNT



LAST UPDATE: 17-06-2024

Bug Report

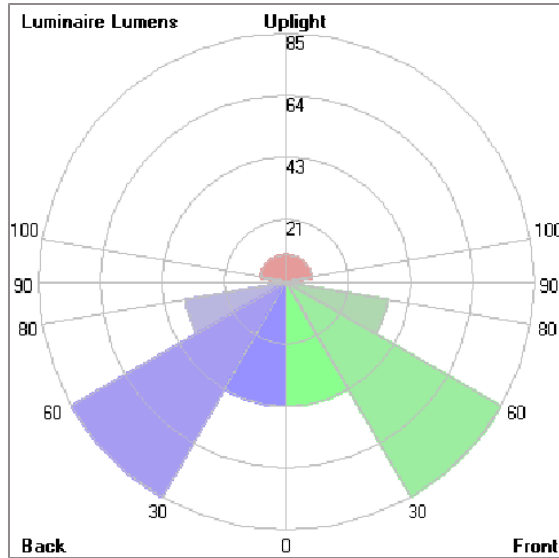

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	42.6	2.4	12.2
FM	[30-60]	85.1	4.7	24.3
FH	[60-80]	35.4	2.0	10.1
FVH	[80-90]	5.1	0.3	1.4
BL	[0-30]	42.6	2.4	12.2
BM	[30-60]	85.1	4.7	24.3
BH	[60-80]	35.4	2.0	10.1
BVH	[80-90]	5.1	0.3	1.4
UL	[90-100]	4.1	0.2	1.2
UH	[100-180]	9.1	0.5	2.6
Total		349.6	19.5	100.0
BUG Rating		BO-U1-G0		

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th