

CAP

MINI CAP – SHORT BOLLARD FLANGE BASE


BOLLARD



LAST UPDATE: 17-06-2026



The CAP range is a fresh range of bollards and low mounted pole lights. Designed from scratch with the latest lighting requirements in mind. The highly efficient LEDs are shielded and emit no upward light. The light engine features great color consistency, excellent color rendering index and dimming options. Specification grade optics make the medium sized version a highly competitive lighting tool for demanding professional lighting tasks. With its compact dimensions the small sized CAP is a smart solution for residential lighting projects. Regardless of size the prewired supply cable, numerous mounting solutions and minimized amount of screws assure a simplified installation process.



Technical Data



| | |
|-----------------------|--------------------|
| Ordering Code : | 7178-0-3-478-XX |
| Lamp : | LED |
| CCT : | 3000 K |
| CRI : | CRI >80 |
| SDCM : | SDCM = 3 |
| Lamp Lumen : | 1070 lm |
| Luminaire Lumen : | 780 lm |
| Lamp Wattage : | 7.1 W |
| Luminaire Wattage : | 8.7 W |
| Efficacy : | 89 lm/W |
| Ambient Temperature : | 50°C |
| Lumen Maintenance | L80B10 >60,000 h |
| Controller : | On-Off |
| Input Voltage : | 220-240Vac 50/60Hz |
| Net Weight : | 1.30 kg. |

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color



Icon definition

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

CAP

MINI CAP – SHORT BOLLARD FLANGE BASE BOLLARD





LAST UPDATE: 17-06-2026

Specification

| | | | | | | | | | | | |
|-------------------------|--|--|----------|--|-------------|--|--------------|--|--------------------|--|----------|
| IEC Standard | IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires | | | | | | | | | | |
| Protection | IP66 Class I | | | | | | | | | | |
| IK Rating | Protection against mechanical impact IK08 on body. | | | | | | | | | | |
| Luminaires Body Housing | Durable high-pressure die-cast aluminum alloy for excellent mechanical performance. Extruded 6063 aluminum body with minimal copper content for corrosion resistance. | | | | | | | | | | |
| Coating Process | The luminaire undergoes a Nano Ceramic surface conversion, making it highly resistant to corrosive environments. It is primarily coated with a durable epoxy resin and finished with a UV-stabilized polyester powder top coat. The coating process is completed by curing the luminaire in a digitally controlled temperature chamber at 200°C, ensuring exceptional durability and long-lasting protection aga | | | | | | | | | | |
| Diffuser | Impact-resistant tempered glass designed for high-temperature environments. | | | | | | | | | | |
| Gasket | Advanced post-cured silicone gasket offering superior weather and thermal resistance [-40°C to +200°C]. | | | | | | | | | | |
| External Screws | Durable stainless steel screws with anti-corrosion grease for extended lifespan. | | | | | | | | | | |
| Cable Entry | M16 cable gland for secure cable entry, compatible with HO5RN-F/HO7RN-F cables [5-10mm]. | | | | | | | | | | |
| Led | Premium LED module with top-tier chips, mounted on MCPCB for heat efficiency. | | | | | | | | | | |
| Driver | Certified constant current LED driver meeting all EMC and safety requirements. | | | | | | | | | | |
| Internal Wire | Reliable silicone-insulated tinned copper internal wire, designed for -40°C to +180°C. | | | | | | | | | | |
| Pre-Wire Cable | Certified pre-wired 3x0.1.0 sqmm cable, featuring HO7RN-F neoprene insulation. Integrated anti-humidity kit preventing moisture buildup and ensuring longevity. | | | | | | | | | | |
| Caution | Installation must be performed as per the provided installation instructions. Confirm water drainage system effectiveness before installation. | | | | | | | | | | |
| Color | <table><tr><td></td><td>Black O1</td></tr><tr><td></td><td>Graphite O2</td></tr><tr><td></td><td>Dark Grey O3</td></tr><tr><td></td><td>Aluminum Silver O4</td></tr><tr><td></td><td>White O6</td></tr></table> | | Black O1 | | Graphite O2 | | Dark Grey O3 | | Aluminum Silver O4 | | White O6 |
| | Black O1 | | | | | | | | | | |
| | Graphite O2 | | | | | | | | | | |
| | Dark Grey O3 | | | | | | | | | | |
| | Aluminum Silver O4 | | | | | | | | | | |
| | White O6 | | | | | | | | | | |

Light Distribution



*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th


CAP

MINI CAP – SHORT BOLLARD FLANGE BASE BOLLARD



LAST UPDATE: 17-06-2026

Bug Report

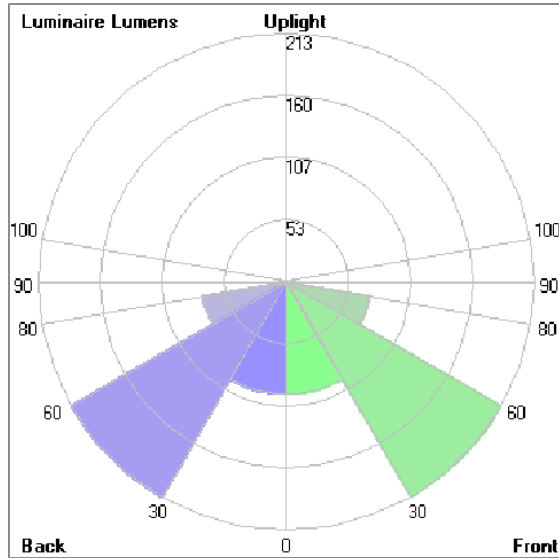

| Lum. Classification System (LCS) | | | | |
|----------------------------------|-----------|-----------------|-------|-------|
| LCS | Zone | %Lumens | %Lamp | %Lum |
| FL | [0-30] | 96.6 | 12.4 | 12.4 |
| FM | [30-60] | 213.1 | 27.3 | 27.3 |
| FH | [60-80] | 73.0 | 9.4 | 9.4 |
| FVH | [80-90] | 7.5 | 1.0 | 1.0 |
| BL | [0-30] | 96.6 | 12.4 | 12.4 |
| BM | [30-60] | 213.1 | 27.3 | 27.3 |
| BH | [60-80] | 73.0 | 9.4 | 9.4 |
| BVH | [80-90] | 7.5 | 1.0 | 1.0 |
| UL | [90-100] | 0.0 | 0.0 | 0.0 |
| UH | [100-180] | 0.0 | 0.0 | 0.0 |
| Total | | 780.4 | 100.2 | 100.0 |
| BUG Rating | | BO-UO-GO | | |

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

CAP

MINI CAP – SHORT BOLLARD FLANGE BASE

BOLLARD



LAST UPDATE: 17-06-2026

Accessories



Ordering Code:

AUN-CON-0013-00

IP68 connection device,
cable diameter 7-11.5mm,

On-Off

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th