

NARA

NARA 120


POLE MOUNTED

 **Unilamp**

LAST UPDATE: 20-09-2024



From slow speed secondary roads to multi lane highways NARA is the perfect solution for all road lighting requirements. T2 and T3 CAD optimized optics are available as a standard product option. On request a NEMA or Zhaga connector can be added. Across the range a 0.8m long pre-wired cable and pressure equalizing element are standard. The cleverly designed pole adapter allows horizontal or vertical pole entry and includes an easy-to-read graduated scale. The housing is cast from a highly corrosion resistant aluminum alloy. The operating temperature of 50°C allows reliable use in challenging environmental conditions.



Technical Data



Ordering Code :	7706-I-3-006-A4
Lamp :	LED
Beam :	T2
CCT :	4000 K
CRI :	CRI >70
SDCM :	SDCM = 5
Luminaire Lumen :	18120 lm
Luminaire Wattage :	120 W
Efficacy :	151 lm/W
Ambient Temperature :	50°C
Lumen Maintenance	L70 >72,000 h [@25°C]
Controller :	On-Off
Input Voltage :	220-240Vac 50/60Hz
Net Weight :	5.20 kg.

Ordering code guide

XXXX-X-X-XXX-XX
A B C D E

- A Product Code
- B Reflector
- C Electrical Component
- D Lamp
- E Color




Icon definition



*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax : +66(0)2 943 2419
online@unilamp.co.th
www.unilamp.co.th

Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires
Protection	IP66 Class I
IK Rating	Protection against mechanical impact IK09
Luminaires Body Housing	High-pressure die cast aluminum alloy body and components.
Coating Process	Luminaire top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.
Diffuser	Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.
Lens	Molded PMMA lens from renowned manufacturers in various light distribution patterns.
Adjustable Optic	Adjustable aiming unit through graduated scale.
Gasket	Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.
External Screws	External screws are in stainless steel with protection grease.
Led	High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.
Driver	High quality constant current LED driver. Conform to safety standard and electromagnetic compatibility standard.
Internal Wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.
Pre-Wire Cable	Pre-wired with 800mm long 3x1 sqmm cable. Equipped with pressure equalization element.
Caution	Installation work has to be carried on according to the enclosed installation manual.
Color	 Aluminum Silver A4

Light Distribution



NARA


NARA 120

POLE MOUNTED



LAST UPDATE: 20-09-2024

Bug Report

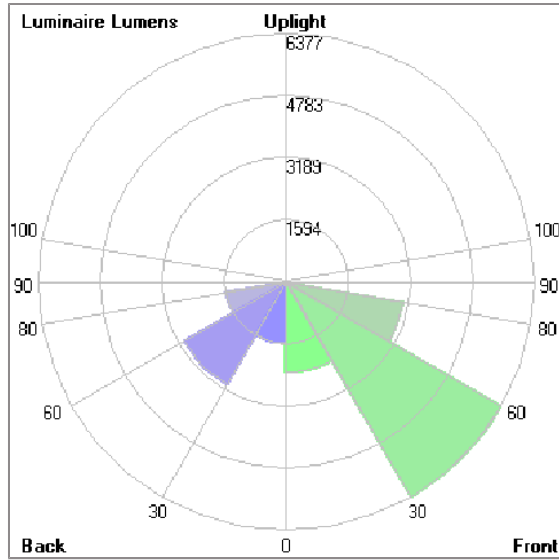

Lum. Classification System [LCS]

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	2337.4	12.9	12.9
FM	[30-60]	6377.2	35.2	35.2
FH	[60-80]	3038.4	16.8	16.8
FVH	[80-90]	93.0	0.5	0.5
BL	[0-30]	1575.8	8.7	8.7
BM	[30-60]	3033.9	16.7	16.7
BH	[60-80]	1571.1	8.7	8.7
BVH	[80-90]	64.0	0.4	0.4
UL	[90-100]	7.0	0.0	0.0
UH	[100-180]	18.6	0.1	0.1
Total		18116.4	100.0	100.0
BUG Rating		B3-U2-G3		

*Due to the constancy of product development, we reserve the right to alter all specification without prior notice.

NARA

NARA 120

POLE MOUNTED



LAST UPDATE: 20-09-2024


Accessories




Ordering Code:
ATR-SEN-0001-00
Photocell, On-Off,
pre-assembly from factory



Ordering Code:
ATR-SOC-0001-00
7 pin NEMA socket
according to ANSI
standard, pre-assembly
from factory



Ordering Code:
ATR-MOT-0003-XX
Wall mount adapter



Ordering Code:
ATR-CAB-0001-00
Extended pre-wired cable,
L= 6000, pre-assembly
from factory



Ordering Code:
ATR-MOT-0004-XX
Double head pole mount
adapter, for 76mm spigot
diameter



Ordering Code:
AUN-MOT-0058-XX
Pole mount adaptor, spigot
diameter 76mm



Ordering Code:
STEEL-POLE-FOR-NARA
Please contact Sales
Representative

*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

Unilamp Co., Ltd.
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1
Fax : +66[0]2 943 2419
online@unilamp.co.th
www.unilamp.co.th