



## KORNER2



### POLE MOUNTED LIGHT

LAST UPDATE: 28-02-2025

#### Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires
Protection	IP66 Class I
IK Rating	Protection against mechanical impact IK10 on body and IK08 on optical part.
Luminaires Body Housing	Extruded aluminum 56063 alloy body with low copper content. High-pressure die cast aluminum alloy body and components.
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.
Diffuser	Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.
Lens	Molded PC lens from renowned manufacturers in various light distribution patterns.
Gasket	Weather resistant silicone gasket. Working temperature -40°C to +200°C.
External Screws	External screws are in stainless steel with protection grease.
Cable Entry	Cable entry protected by M20 cable gland. To be used with H05RN-F/ H07RN-F cable with 7-13mm. diameter.
Led	High efficiency LED module utilized chips from world renowned manufacturer. Assembled on MCPCB and mounted on to heat conductive material.
Driver	High quality constant current DALI driver with CASAMBI interface. Conform to applicable safety standards and electromagnetic compatibility.
Enhanced Protection	The luminaire is equipped with a 10kV surge protection device, the function of the protector is indicated by a LED, performance in compliance with IEC61643-11.
Internal Wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.
Terminal Block	Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved. Class1 luminaire provided with the earth connection.
Pre-Wire Cable	Pre-wired with 3x1.0 sqmm. H07RN-F neoprene cable. IMQ approved.
Caution	Installation work has to be carried on according to the enclosed installation manual.
Color	<div> <div style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></div> Black 01                 <div style="display: inline-block; width: 15px; height: 15px; background-color: #333; margin-right: 5px; margin-left: 10px;"></div> Graphite 02                 <div style="display: inline-block; width: 15px; height: 15px; background-color: #666; margin-right: 5px; margin-left: 10px;"></div> Dark Grey 03                 <div style="display: inline-block; width: 15px; height: 15px; background-color: #ccc; margin-right: 5px; margin-left: 10px;"></div> Aluminum Silver 04                 <div style="display: inline-block; width: 15px; height: 15px; background-color: #fff; margin-right: 5px; margin-left: 10px;"></div> White 06             </div>

#### Light Distribution



# KORNER


## KORNER2

### POLE MOUNTED LIGHT



LAST UPDATE: 28-02-2025

#### Bug Report

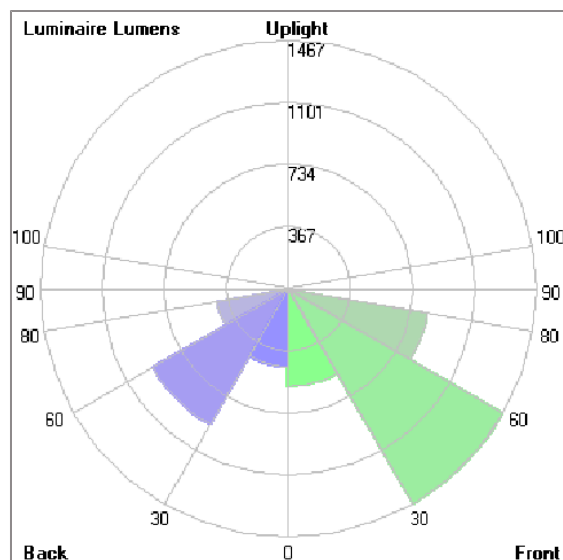

#### Lum. Classification System (LCS)

LCS	Zone	%Lumens	%Lamp	%Lum
FL	[0-30]	575.8	6.5	12.2
FM	[30-60]	1467.4	16.5	31.0
FH	[60-80]	835.4	9.4	17.6
FVH	[80-90]	25.6	0.3	0.5
BL	[0-30]	462.6	5.2	9.8
BM	[30-60]	925.6	10.4	19.5
BH	[60-80]	427.2	4.8	9.0
BVH	[80-90]	15.5	0.2	0.3
UL	[90-100]	0.5	0.0	0.0
UH	[100-180]	3.3	0.0	0.1
Total		4738.9	53.3	100.0
BUG Rating		B1-U1-G1		

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th

#### Accessories



Ordering Code:  
AUN-CON-0009-00  
IP68 connection device,  
cable diameter 5-9.5mm,  
On-Off



Ordering Code:  
AUN-CON-0010-00  
IP68 connection device 3  
pole, cable diameter  
5-9.5mm, with distribution  
block




Ordering Code:  
AUN-CON-0013-00  
IP68 connection device,  
cable diameter 7-11.5mm,  
On-Off




Ordering Code:  
AUN-ACB-0008-00  
Anchor bolt kit, pole  
diameter 102mm and  
151x102mm, galvanized  
steel pole



Ordering Code:  
AUN-ACB-0022-00  
Anchor bolt kit, aluminum  
pole

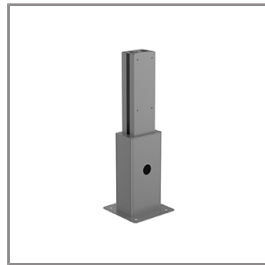

Ordering Code:  
AUN-ACB-0023-00  
Planted root, aluminum  
pole



Ordering Code:  
AUN-ACB-0024-00  
Planted root, galvanized  
steel pole



Ordering Code:  
AUN-CLP-0010-XX  
Pole clamp, pole diameter  
60mm, single side  
luminaire mounting



Ordering Code:  
AUN-CLP-0011-XX  
Pole clamp, pole diameter  
60mm, double sided  
luminaire mounting



Ordering Code:  
AUN-CLP-0012-XX  
Pole clamp, pole diameter  
76mm, single side  
luminaire mounting



Ordering Code:  
AUN-CLP-0013-XX  
Pole clamp, pole diameter  
76mm, double sided  
luminaire mounting



Ordering Code:  
AUN-BRK-0004-XX  
Mounting bracket

# KORNER

## KORNER2

### POLE MOUNTED LIGHT



LAST UPDATE: 28-02-2025



Ordering Code:  
ALUMINUM-POLE-FOR-KORNER  
Please contact Sales  
Representative



Ordering Code:  
STEEL-POLE-FOR-KORNER  
Please contact Sales  
Representative

\*Due to the constancy of product development,  
we reserve the right to alter all specification  
without prior notice.

Unilamp Co., Ltd.  
461 Ramintra Road, Kannayao, Bangkok 10230 Thailand  
Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1  
Fax : +66[0]2 943 2419  
online@unilamp.co.th  
www.unilamp.co.th